


HMMB-F04(ISC2BB)

Type: Metal Bellow Seal
 Replacement: Flowserve ISC2 BB
 Temperature: -30°C to $+205^{\circ}\text{C}$
 Pressure: $\leq 1.3\text{Mpa}$ - 2.1Mpa
 Speed: $\leq 25\text{m/s}$
 Material: A,B,Q1,Q2,U1,U2,T,
 T6,V,G,F,M,M1

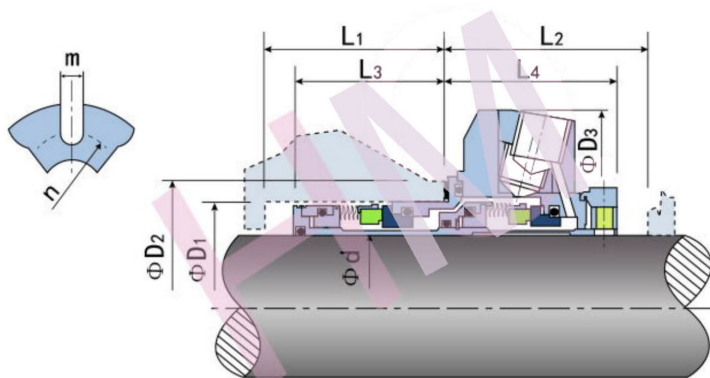

hengmi@mesel.com

d	D1		D2	D3	L1	L2	L3	L4	M	N
	min	max								
1.000	1.625	1.875	2.115	3.69-3.75	1.900	2.124	1.838	2.062	0.44	2.750
1.125	1.750	2.000	2.240	3.69-3.75	1.900	2.124	1.838	2.062	0.44	2.875
1.250	1.890	2.245	2.495	4.19-4.25	1.900	2.124	1.838	2.062	0.562	3.125
1.375	2.000	2.575	2.615	3.94-4.00	1.900	2.124	1.838	2.062	0.44	3.250
1.437	2.250	2.688	2.775	4.72-4.78	1.965	2.184	1.903	2.122	0.56	3.750
1.500	2.250	2.525	2.775	4.69-4.75	1.965	2.184	1.903	2.122	0.56	3.750
1.625	2.375	2.780	3.030	4.69-4.75	1.965	2.184	1.903	2.122	0.56	3.750
1.750	2.500	2.875	3.150	4.94-5.00	1.965	2.184	1.903	2.122	0.56	3.875
1.875	2.625	2.875	3.150	4.94-5.00	1.965	2.184	1.903	2.122	0.56	3.875
1.957	2.690	2.920	TBD	TBD	1.965	2.184	1.903	2.122	TBD	TBD
2.000	2.750	3.030	3.280	5.00-5.12	1.965	2.184	1.903	2.122	0.688	4.120
2.125	2.875	3.125	3.430	5.94-6.00	1.965	2.184	1.903	2.122	0.75	4.250
2.250	3.000	3.280	TBD	TBD	1.965	2.184	1.903	2.122	TBD	TBD
2.375	3.125	3.687	3.975	6.32-6.38	1.965	2.184	1.903	2.122	0.75	4.875
2.437	2.375	3.450	TBD	6.32-6.38	1.996	2.153	1.934	2.091	0.75	4.875
2.500	3.375	3.687	3.975	6.32-6.38	1.965	2.184	1.903	2.122	0.75	4.875
2.625	3.625	4.512	4.615	7.19-7.25	2.491	2.968	2.429	2.906	0.88	5.625
2.750	3.750	4.512	4.615	7.19-7.25	2.491	2.968	2.429	2.906	0.88	5.625