


HMMB-F05(X-100)



Type: Metal Bellow Seal
 Replacement: Flowserve X- 100
 Temperature: -30°C to +204°C
 Pressure: ≤2.0Mpa
 Speed: ≤25m/s
 Material : Q2,B,U2,P,E,V,F,G

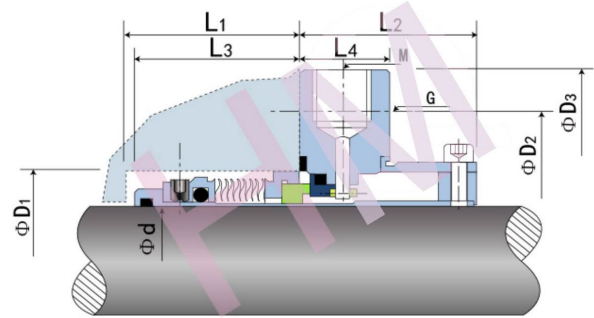

hengmi@mes seal.com

d (inch)	D1		D2 min	D3	G max	L1 min	L2	L3	L4	M
	min	max								
1.000	1.750	1.875	2.75	3.75	0.375	1.78	2.00	1.69	1.02	3/8
1.125	1.750	2.000	3.00	3.88	0.500	1.78	2.00	1.69	1.02	3/8
1.250	2.000	2.125	3.12	4.25	0.500	1.97	2.00	1.88	1.02	3/8
1.375	2.000	2.250	3.25	4.25	0.375	1.97	2.00	1.88	1.02	3/8
1.500	2.250	2.500	3.75	4.75	0.375	1.97	2.00	1.88	1.02	3/8
1.625	2.375	2.625	3.75	4.75	0.500	1.97	2.00	1.88	1.02	3/8
1.750	2.500	2.750	3.75	5.00	0.500	1.97	2.00	1.88	1.02	3/8
1.875	2.625	2.875	3.88	5.00	0.500	1.97	2.00	1.88	1.02	3/8
2.000	2.750	3.000	4.12	5.12	0.625	1.97	2.00	1.88	1.02	3/8
2.125	2.875	3.250	4.38	6.00	0.625	1.97	2.00	1.88	1.02	3/8
2.250	3.000	3.375	4.62	6.50	0.625	1.97	2.00	1.88	1.02	3/8
2.375	3.250	3.625	5.00	6.38	0.625	2.16	2.09	2.06	1.11	3/8
2.500	3.375	3.750	5.00	6.62	0.625	2.16	2.09	2.06	1.11	3/8
2.625	3.500	3.875	5.75	7.25	0.750	2.16	2.09	2.06	1.11	3/8
2.750	3.750	3.875	As Required			2.16	2.62	2.06	1.58	3/4
2.750	3.875	3.875				2.16	2.62	2.06	1.58	3/4
2.875	3.875	3.875				2.16	2.62	2.06	1.58	3/4
2.875	4.000	3.875				2.16	2.62	2.06	1.58	3/4
3.000	4.000	3.875				2.16	2.62	2.06	1.58	3/4
3.000	4.125	3.875				2.16	2.62	2.06	1.58	3/4
3.125	4.250	3.875				2.16	2.62	2.06	1.58	3/4
3.250	4.375	/				2.75	2.19	1.71	1.58	3/4
3.375	4.500	/				2.75	2.19	1.71	1.58	3/4
3.500	4.625	/				2.75	2.19	1.71	1.58	3/4
3.625	4.750	/				2.75	2.19	1.71	1.58	3/4
3.750	4.875	/				2.75	2.19	1.71	1.58	3/4
3.875	5.000	/				2.75	2.19	1.71	1.58	3/4