


HMMB-F02(BX)

Type: Metal Bellow Seal
 Replacement: Flowserve BX
 Temperature: -30°C to +204°C
 Pressure: $\leq 2.7\text{Mpa}$
 Speed: $\leq 23\text{m/s}$
 Material: A,B,Q1,Q2,U1,U2,
 T,T6,V,G,F,M,M1

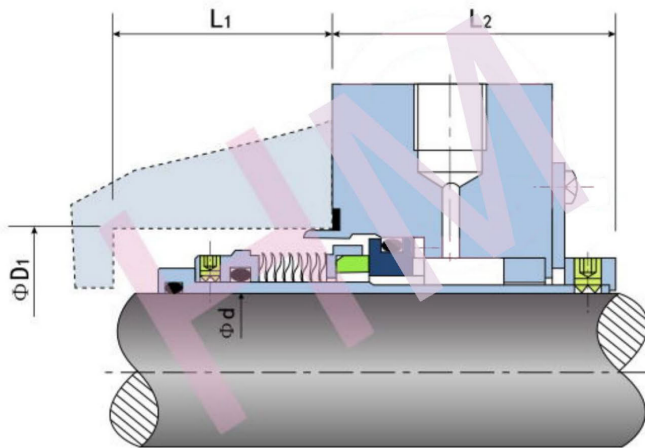

hengmi@mesecal.com

d (inch)	D1	L1	L2
0.750	1.625	1.437	1.937
0.812	1.687	1.468	1.968
0.875	1.750	1.468	1.968
1.000	1.875	1.406	2.000
1.125	2.000	1.281	2.312
1.250	2.125	1.375	2.312
1.375	2.250	1.531	2.343
1.437	2.562	1.625	2.375
1.562	2.687	1.937	2.500
1.687	2.812	1.968	2.500
1.812	2.937	1.937	2.531
1.937	3.187	1.906	2.656
2.062	3.312	1.906	2.656
2.187	3.437	1.906	2.718
2.250	3.562	2.062	2.718
2.375	3.562	2.062	2.718
2.500	3.687	2.125	2.875
2.625	3.937	2.062	3.000
2.750	4.062	2.062	3.000
2.875	4.250	2.156	3.156
3.000	4.375	2.156	3.156
3.125	4.500	2.156	3.156
3.250	4.625	2.156	3.156
3.500	4.875	2.156	3.156
3.750	5.187	2.156	3.375
4.000	5.500	2.156	3.406
4.250	5.750	2.156	3.406
4.750	6.250	2.250	3.406