


HMMB-F03(X-200)

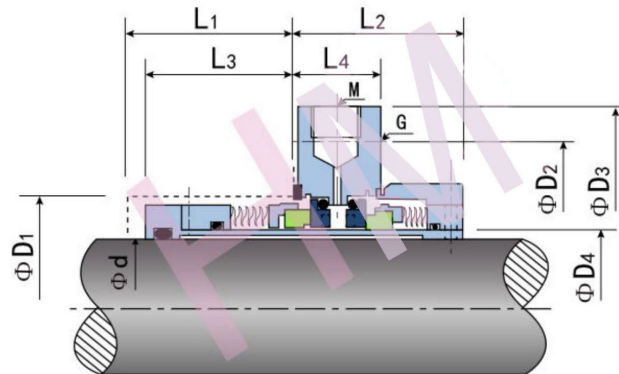

Type: Metal Bellow Seal
Replacement: Flowserve X-200
Temperature: -30°C to +204°C

Pressure: ≤ 2.0 Mpa

Speed: ≤ 25 m/s

Material: A,B,Q1,Q2,U1,U2,T,T6,V,G,F,M,M1

d (inch)	D1		D4	L1 min	L2	L3	L4	G max	D2 min	D3	M	
	min	max										
1.000	1.750	1.875	1.125	1.78	2.00	1.69	1.02	0.375	2.75	3.75	3/8	
1.125	1.750	2.000	*1.250	1.78	2.00	1.69	1.02	0.500	3.00	3.88	3/8	
1.250	2.000	2.125	1.375	1.97	2.00	1.88	1.02	0.500	3.12	4.25	3/8	
1.375	2.000	2.250	*1.500	1.97	2.00	1.88	1.02	0.375	3.25	4.25	3/8	
1.500	2.250	2.500	1.625	1.97	2.00	1.88	1.02	0.375	3.75	4.75	3/8	
1.625	2.375	2.625	1.750	1.97	2.00	1.88	1.02	0.500	3.75	4.75	3/8	
1.750	2.500	2.750	1.875	1.97	2.00	1.88	1.02	0.500	3.75	5.00	3/8	
1.875	2.625	2.875	2.000	1.97	2.00	1.88	1.02	0.500	3.88	5.00	3/8	
2.000	2.750	3.000	2.125	1.97	2.00	1.88	1.02	0.625	4.12	5.12	3/8	
2.125	2.875	3.250	2.250	1.97	2.00	1.88	1.02	0.625	4.38	6.00	3/8	
2.250	3.000	3.375	2.375	1.97	2.00	1.88	1.02	0.625	4.62	6.50	3/8	
2.375	3.25	3.625	2.500	2.16	2.09	2.06	1.11	0.625	5.00	6.38	3/8	
2.500	3.375	3.750	2.625	2.16	2.09	2.06	1.11	0.625	5.00	6.62	3/8	
2.625	3.500	3.875	2.750	2.16	2.09	2.06	1.11	0.750	5.75	7.25	3/8	
2.750	3.750	\	2.875	2.16	2.62	2.06	1.58	As Required			3/4	
2.750	3.875	\	**3.000	2.16	2.62	2.06	1.58					3/4
2.875	3.875	\	3.000	2.16	2.62	2.06	1.58					3/4
2.875	4.000	\	**3.125	2.16	2.62	2.06	1.58					3/4
3.000	4.000	\	3.125	2.16	2.62	2.06	1.58					3/4
3.000	4.125	\	**3.250	2.16	2.62	2.06	1.58					3/4
3.125	4.250	\	3.375	2.16	2.62	2.06	1.58					3/4
3.250	4.375	\	3.500	2.28	2.75	2.19	1.71					3/4
3.375	4.500	\	3.625	2.28	2.75	2.19	1.71					3/4
3.500	4.625	\	3.750	2.28	2.75	2.19	1.71					3/4
3.625	4.750	\	3.875	2.28	2.75	2.19	1.71					3/4
3.750	4.875	\	4.000	2.28	2.75	2.19	1.71					3/4
3.875	5.000	\	4.125	2.28	2.75	2.19	1.71					3/4