


HMMB-F06(CBR)



Type: Metal Bellow Seal
 Replacement: Flowserve CBR
 Temperature: -30 to +200°C
 Pressure: ≤ 2.5 Mpa
 Speed: ≤ 20 m/s
 Material : Q1,Q2,U2,T,V,M1,F,G,M

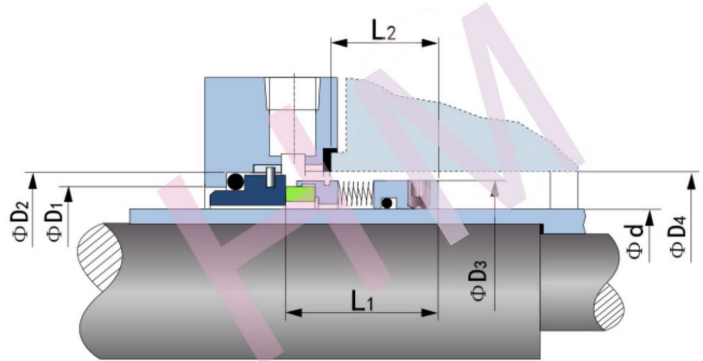

hengmi@mes seal.com

d (inch)	D1	D2	D3	D4	L1	L2
0.750	1.140	1.375	1.312	1.375	1.38	1.00
0.875	1.265	1.500	1.437	1.500	1.38	1.00
1.000	1.390	1.625	1.562	1.625	1.38	1.00
1.125	1.515	1.750	1.687	1.750	1.38	1.00
1.250	1.640	1.875	1.812	1.875	1.38	1.00
1.375	1.765	2.000	1.937	2.000	1.56	1.19
1.500	1.890	2.125	2.062	2.125	1.56	1.19
1.625	2.015	2.375	2.187	2.25	1.56	1.19
1.750	2.140	2.500	2.312	2.375	1.56	1.19
1.875	2.265	2.625	2.437	2.500	1.56	1.19
2.000	2.390	2.750	2.562	2.625	1.56	1.19
2.125	2.515	2.875	2.687	2.75	1.56	1.19
2.250	2.640	3.000	2.812	2.875	1.56	1.19
2.375	2.765	3.125	2.937	3.0000	1.56	1.19
2.500	3.015	3.375	3.187	3.250	1.75	1.38
2.625	3.140	3.500	3.312	3.375	1.75	1.38
2.750	3.265	3.625	3.437	3.500	1.75	1.38
2.875	3.390	3.750	3.625	3.687	1.75	1.38
3.000	3.515	3.875	3.75	3.812	1.75	1.38
3.125	3.765	4.125	3.875	3.937	1.75	1.38
3.250	3.890	4.250	4.000	4.062	1.75	1.38
3.375	4.015	4.375	4.125	4.187	1.75	1.38
3.500	4.140	4.500	4.250	4.312	1.88	1.50