


HMCS-FT04(C2SQ)



Type: Single Cartridge Seal with throttle bushing
for low pressure, Recommended for general
purpose.


Replacement: Fluiten C2SQ

Temperature: -40 to +260°C

Pressure: ≤ 25 Bar

Speed: ≤ 12 m/s

Material : Q1,Q2,U2,T,V,M1,F,G,M

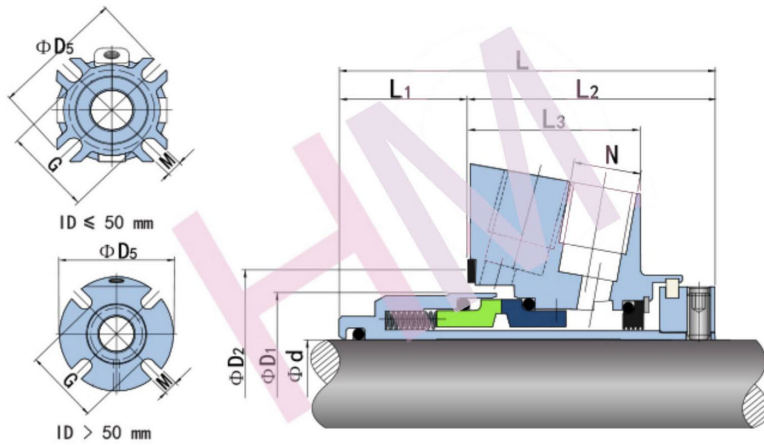

hengmi@meseal.com

d (mm)	D1	D2		D5	G	L	L1	L2	L3	M	N
		min	max								
25	43	44.0	51.0	98	63	74.5	25	49.5	33.5	12	1/4"
28	46	47.0	52.0	98	63	74.5	25	49.5	33.5	12	1/4"
30	48	49.0	56.0	98	65	74.5	25	49.5	33.5	12	1/4"
32	50	51.0	57.0	106	68	74.5	25	49.5	33.5	12	1/4"
33	53	54.0	61.5	106	68	78.0	25	53.0	36.0	12	1/4"
35	53	54.0	61.5	106	68	78.0	25	53.0	36.0	12	1/4"
38	56	57.0	66.0	120	76	79.0	25	54.0	37.0	14	1/4"
40	58	59.0	68.0	120	76	79.0	25	54.0	37.0	14	1/4"
43	61	62.0	70.5	135	81	79.0	25	54.0	37.0	14	1/4"
45	63	64.0	73.0	135	81	79.0	25	54.0	37.0	14	1/4"
48	66	67.0	75.0	148	87	79.0	25	54.0	37.0	14	1/4"
50	68	69.0	78.0	148	87	81.0	25	56.0	39.0	14	1/4"
55	73	74.0	83.0	148	95	82.5	25	57.5	40.0	18	3/8"
60	78	79.0	91.0	158	102	82.5	25	57.5	40.0	18	3/8"
65	83	84.5	98.5	163	112	82.5	25	57.5	40.0	18	3/8"
70	93	95.0	108.0	178	125	87.5	25	62.5	45.0	18	3/8"
75	98	100.0	113.0	185	130	87.5	25	62.5	45.0	18	3/8"
80	105	107.0	118.0	193	135	99.0	30	69.0	49.0	18	3/8"
85	110	113.0	123.0	198	140	99.0	30	69.0	49.0	22	3/8"
90	115	118.0	130.0	205	145	99.0	30	69.0	49.0	22	3/8"
95	120	124.0	135.0	209	150	100.0	31	69.0	49.0	22	3/8"
100	126	129.0	140.0	218	155	100.0	31	69.0	49.0	22	3/8"