



HMMB-DC

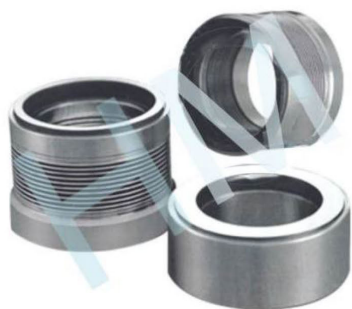

Type: Metal Bellow Seal
 Temperature: -20 to +200°C
 Pressure : ≤ 2.0 Mpa
 Speed: ≤ 20 m/s
 Material : Q1, Q2, U2, T, V, M1, F, G, M

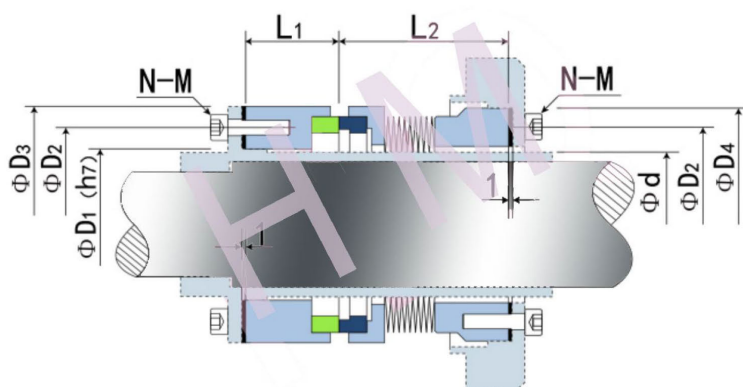

hengmi@mesel.com

Model	d (mm)	D1	D2	D3	D4	L1	L2	N-M
DC-30	27.0	32.5	40	47	47	18	30	8-M4
DC-35	31.5	36.0	44	51	51	20	30	8-M4
DC-40	37.0	42.5	52	62	62	25	40	6-M6
DC-45	41.5	46.5	56	67	67	25	45/52	6-M6
DC-50	46.5	51.5	62	72	72	25	45/52	6-M6
DC-55	51.5	56.5	67	78	78	30	45/55	6-M6
DC-60	53.0	61.0	72	83	83	30	45/55	6-M6
DC-65	58.5	66.0	76	88	88	30	45/55	6-M6
DC-70	67.0	72.5	84	97	97	30	50/55	6-M6
DC-75	73.0	77.5	88	98	98	30	50	6-M6
DC-80	73.5	79.5	91	103	103	30	50	6-M6
DC-85	78.0	85.5	97	108	108	30	50	6-M6
DC-90	86.0	92.5	103	115	115	30	50/58	6-M6
DC-95	90.0	97.5	110	121	121	30	50	8-M6
DC-100	95.0	102.5	113	124	124	30	50	8-M6