


HMMB-B



Type: Metal Bellow Seal
 Temperature: -40 to +220°C
 Pressure: ≤1.6Mpa
 Speed: ≤20m/s
 Material : Q1,Q2,U2,T,V,M1,
 F,G,M

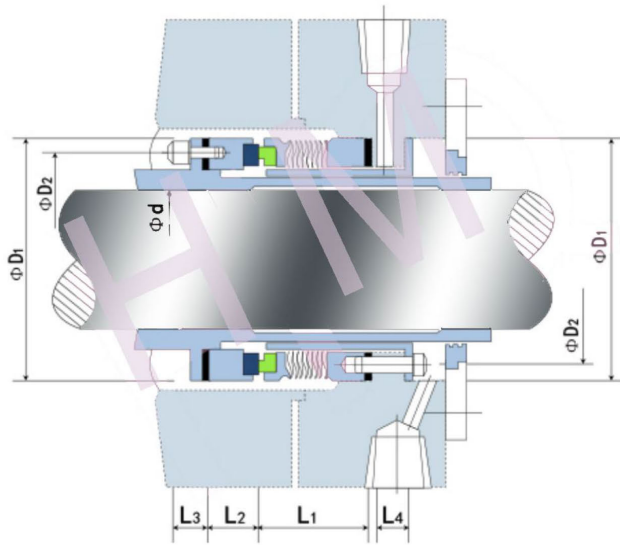

hengmi@mesecal.com

Spec	d (mm)	D1	D2	L1 (+/-0.5)	L2	L3	L4
30	20	48	39.0	53	25	10.0	11.0
35	25	53	44.0	53	25	10.0	11.0
40	28	63	51.5	53	25	10.0	11.0
45	30,35	67	56.0	53	25	11.0	11.0
50	40	72	61.5	53	25	11.0	11.0
55	45	78	67.0	56	30	12.0	12.0
60	45	83	72.0	56	30	12.0	12.0
65	50,55	88	78.0	56	30	12.0	12.0
75	65	98	89.0	56	30	12.0	12.0
80	65	103	90.0	59	30	12.5	12.5
85	70,75	108	97.0	59	30	12.5	12.5
90	75,80	115	103.0	59	30	12.5	12.5
95	80,85	120	106.0	60	30	12.5	12.5
100	85,90	125	115.0	61	30	12.5	12.5