


HM301

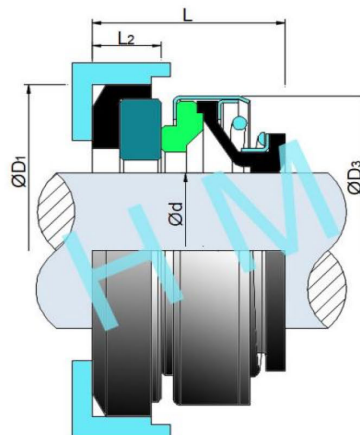

Type : Elastomeric bellow mechanical seal
 Replacement: AES B01 , Vulcan 18 , Crane PR/DR,
 Burgmann BT-AR , Flowserve 118
 Temperature: -20°C to +120°C

Pressure: $\leq 0.6\text{Mpa}$
 Speed: $\leq 10\text{m/s}$
 Material: V,Q1,Q2,U2,U1,B,A,P,E,V,F,G

Size (mm)	d	D3	D1	L	L2
6	6	18	18	14.0	4.0
8S	8	18	22	15.0	4.0
8M	8	20	22/26	15.0	4/5.5
8L	8	24	26	15.0	5.5
10	10	24	26	21.0	8.0
11	11	24	26	21.0	8.0
12	12	24	25/26	21.0	8.0
13	13	24	26	19.5	5.5/8
13L	13	28	28	21.0	8.0
13H	13	32	29.5	30.5	8.0
14	14	28	28/28.5	21.0	8.0
14L	14	32	29.5	21.0	8.0
15S	15	28	28.5/30	21.0	8.0
15M	15	32	30/29.5	21.0	8.0
15L	15	39	38	21.0	8.0
16S	16	28	29.5/30	21.0	8.0
16M	16	32	29.5	21.0	8.0
16L	16	39	38	21.0	8.0
16H	16	32	30	21.0	10.0
17	17	39	42	21.0	8.0
18	18	39	42	21.0	8.0
19	19	39	42	21.0	8.0
20	20	39	42	21.0	8.0