


# HMFR-2

Type: Suit for FRISTAM Pumps  
 Replacement: AES T01F(22mm,30mm,35mm)  
 Temperature: -20°C to +180°C  
 Pressure: ≤1.0Mpa  
 Speed: ≤15m/s  
 Material: B,A1,Q1,Q2,U2,P,E,N,V,F,G




HMFR-02-A+D(Vulcan W-XX08/12)

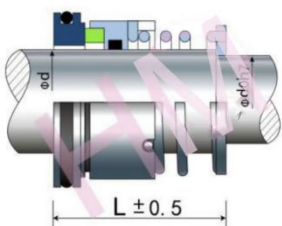


d (mm)	d0	L	Model	Pump type
22	18	22	FR -08-A22	FP/ FL/ FT
30	22	24	FR -08-A30	
35	30	26	FR -08-A35	

HMFR-02-B(Vulcan W-

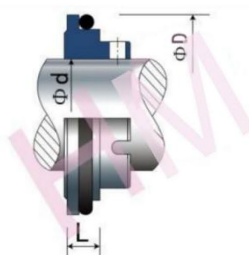


d (mm)	D	L	Model	Pump type
22	41.2	7.5	FR -08-B22	FP/ FL/ FT
30	48.0	7.6	FR -08-B30	
35	55.5	8.6	FR -08-B35	

HMFR-02-C(Vulcan W-XX08/12B)

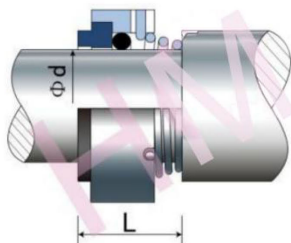


d(mm)	L	Model	Spring	Pump type
22	20	FR -08-C22	LEFT	FP/ FL/ FT
30	22	FR -08-C30	LEFT	
35	26	FR -08-C35	LEFT	
			RIGHT	

HMFR-02-D(Vulcan W-XX05/6)



d (mm)	D	L	Model	Pump type
22	41.2	7.5	FR -08-C22	FP/ FL/ FT
30	48.0	7.6	FR -08-C30	
35	55.5	8.6	FR -08-C35	

HMFR-02-E(Vulcan Y-XX08/2)

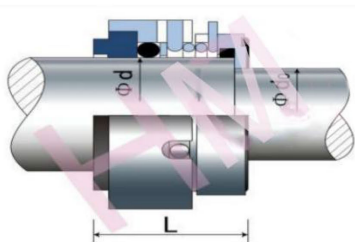

d (mm)	d0	L	Model	Pump type
22	18	18	FR-08-E22	FP/ FL/ FT
30	22	22	FR-08-E30	
35	28	28	FR-08-E35	