


HM60/65



Type: Suit for Grundfos, Hilge Pumps
 Replacement: Vulcan 60/65, AES B04/B04U,
 Crane106, Roten 16, Flowserve 160
 Temperature: -20 to +120°C
 Pressure: $\leq 0.5\text{Mpa}$
 Speed: $\leq 10\text{m/s}$
 Material : B, Q2, U2, P, E, N, V, F, G, Alfa

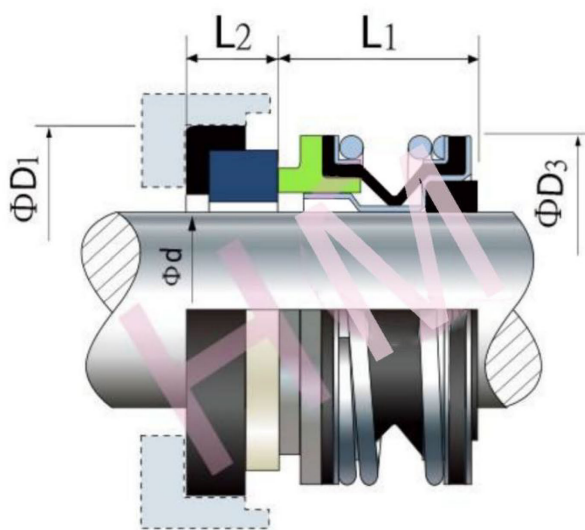

Size (mm)	d	D1	D3	L1	L2
60/0.375	9.5	22.2	24.00	16.00	6.20
60/0.500	12.7	25.4	27.00	16.60	6.20
60/0.625	15.8	31.8	31.00	18.70	10.31
60/0.750	19.0	34.9	34.20	18.70	10.31
60/1.000	25.4	41.3	43.00	20.60	11.10
65/0.375	9.5	25.4	27.00	16.60	7.90
65/0.500	12.7	25.4	27.00	16.60	7.90
65/0.625	15.8	31.7	31.00	18.20	10.30
65/0.750	19.1	34.9	34.20	18.20	10.30
65/1.750	63.5	61.0	51.59	33.34	10.32