


HM502L

Type: Suit for Grundfos, Hilge Pumps
 Replacement: AES B07SL, Vulcan 502/BP
 Temperature : -20°C to +120°C
 Pressure: $\leq 2.5\text{Mpa}$
 Speed: $\leq 15\text{m/s}$
 Material : A, Q1, Q2, U1, U2, Graphite, F, G, M, M5

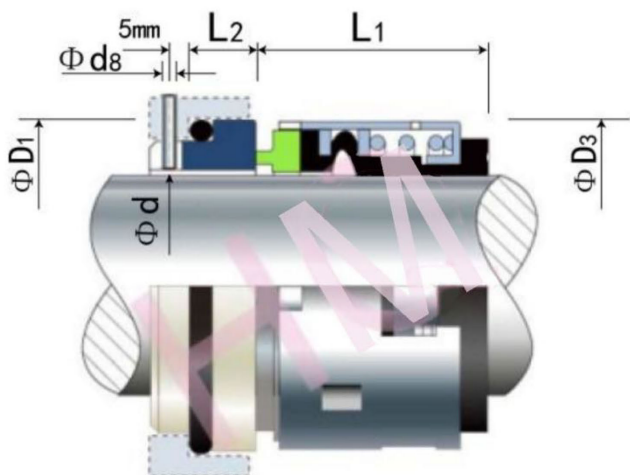

| Size (mm) | D1 | D3 | d8 | L1 | L2 |
|-----------|----|------|----|------|------|
| 12 | 23 | 22.0 | 3 | 23.9 | 8.6 |
| 14 | 25 | 24.0 | 3 | 26.4 | 8.6 |
| 16 | 27 | 26.2 | 3 | 26.4 | 8.6 |
| 18 | 33 | 32.2 | 3 | 27.5 | 10.0 |
| 20 | 35 | 33.9 | 3 | 27.5 | 10.0 |
| 22 | 37 | 36.1 | 3 | 27.5 | 10.0 |
| 24 | 39 | 38.1 | 3 | 30.0 | 10.0 |
| 25 | 40 | 38.8 | 3 | 30.0 | 10.0 |
| 28 | 43 | 42.1 | 3 | 32.5 | 10.0 |
| 30 | 45 | 44.2 | 3 | 32.5 | 10.0 |
| 32 | 48 | 45.8 | 3 | 32.5 | 10.0 |
| 33 | 48 | 46.9 | 3 | 32.5 | 10.0 |
| 35 | 50 | 48.8 | 3 | 32.5 | 10.0 |
| 38 | 56 | 54.2 | 4 | 34.0 | 11.0 |
| 40 | 58 | 56.1 | 4 | 34.0 | 11.0 |
| 43 | 61 | 58.8 | 4 | 34.0 | 11.0 |
| 45 | 63 | 60.9 | 4 | 34.0 | 11.0 |
| 48 | 66 | 64.1 | 4 | 34.0 | 11.0 |
| 50 | 70 | 66.2 | 4 | 34.5 | 13.0 |