


HMKSB-06



Type: Mechanical Seal
Replacement: Suit for K.S.B Pumps
Temperature: $\leq 60^{\circ}\text{C}$
Pressure : $\leq 11\text{Mpa}$
Speed: $\leq 1500\text{r/min}$
Material : B,Q2,U2,P,E,N,V,F,G,Alfa

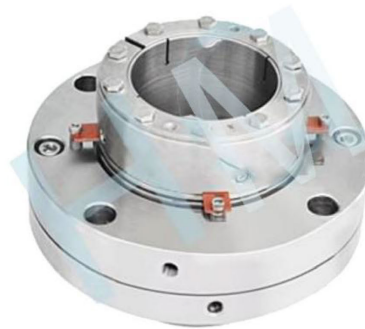

*** Product description:**

Frame oil seal is installed in the product gland, and a closed space is formed between the sealing ring. Flushing water is connected in the space, providing flushing and cooling effect for sealing ring and spring during operation to ensure stable use of mechanical seal.

*** Apply to the host**

HMKSB

*** Application:**

Thermal power generation

*** Working pump position:**

Cooling pump condensate pump, condensate pump.

