


## HMCS-J51(SAF)

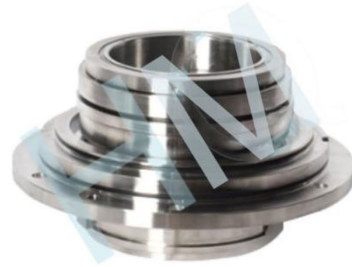

Type : Double Cartridge Seal,Suit Sulzer,Andritz  
Process Pumps  
Replacement: Crane SAF  
Temperature : -40 to +180°C  
Pressure :  $\leq 2.5$ Mpa  
Speed:  $\leq 10$ m/s  
Material : Q1,Q2,U2,T,V,M1,F,G,M

\* **Product description:** this series mechanical seal is my company in the late 1990 s for mud pump design of a container type mechanical seal, mechanical seal for module focuses on medium containing solid particles, change of the mechanical seal material can also be used for metallurgy, mining, chemical and other industries of high solid content condition.

\* **Apply to the host:**

Andritz pressure screden mechanical seal.

\* **Product features**

Dual face structure, no leakage.

The particle medium has little effect on spring performance.

High temperature resistance, corrosion resistance and wear resistance.

\* **Product parameters**

Temperature:  $\leq 150$  °C

Pressure:  $\leq 0.8$  Mpa

Wash:

Speed:  $\leq 10$  r/min

Specification: 40mm, 50mm, 60mm, 70mm, 90mm .



[www.hengmiseal.com](http://www.hengmiseal.com)