


## HMWAR-03

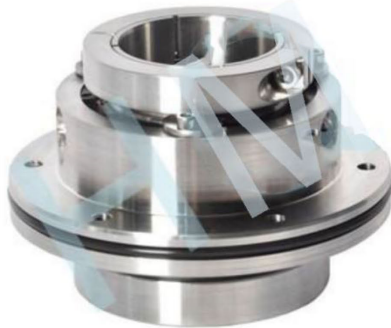

Type: Slurry Pump Seals  
Replacement: Suit for WARMAN Pumps  
Temperature :  $\leq 150^{\circ}\text{C}$   
Pressure :  $\leq 1.5\text{Mpa}$   
Speed:  $\leq 10\text{rpm}$   
Material : Q1,Q2,A,B,U1,U2,P,E,V,T,F,G,T2,M5

### \* Product description:

this series of mechanical seals is a mechanical seal of slurry pump.

The mechanical seal is of good versatility and can be applied to a variety of powerful pumps. High efficiency, low energy consumption, high reliability and excellent performance.

### \* Apply to the host:

Warman factory.



### \* Product features:

High temperature resistance, corrosion, wear, high pressure.

Friction pair is silicon carbide for silicon carbide.

Good sealing performance and long service life.

### \* Application industry:

Coal- fired power generation metallurgical coal chemical building materials.

### \* Pump position:

Slurry pump centrifugal pump.



[www.hengmiseal.com](http://www.hengmiseal.com)