


HMWL-03



Type: Suit for Wilo Submersible Pumps
 Replacement: Lidering 107
 Temperature: -20 to +150°C
 Pressure : ≤ 2.1 Mpa
 Speed: ≤ 15 m/s
 Material : B,Q2,U2,P,E,N,V,F,G,Alfa

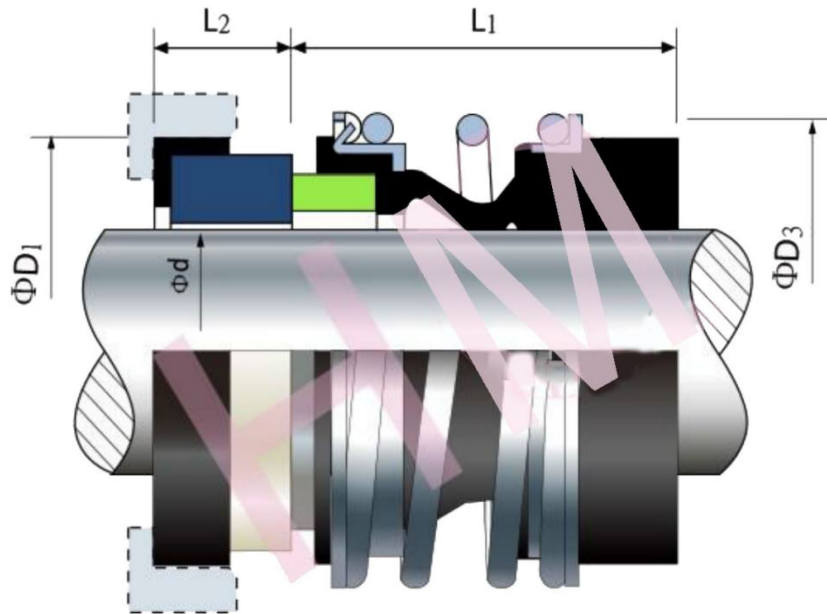

d (mm)	D1	D3	L1	L2
22	37	37.0	30.0	7.5
28	43	49.0	42.5	7.5
38	56	59.0	46.0	9.0
48	66	70.5	51.0	9.0

