


HMK-B12(MR-D)



Type: Kettle Seal
 Replacement: Burgmann MR-D
 Temperature: -20°C to +200°C
 Pressure : ≤1.6Mpa
 Speed : ≤5m/s
 Material : According to application and customer's specification

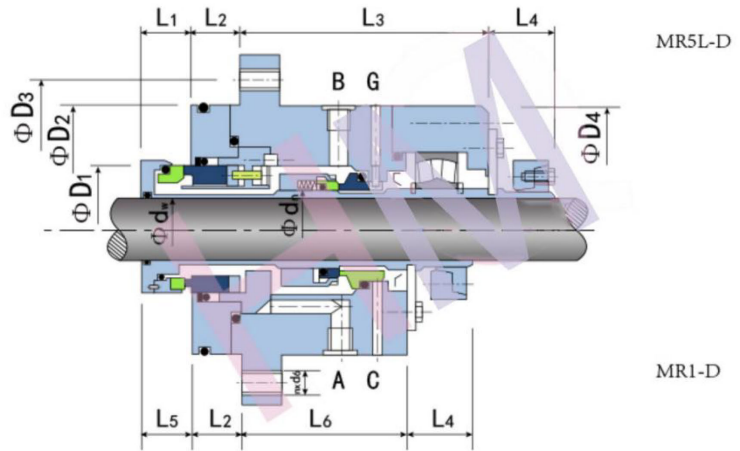

hengmi@meseal.com

dn (mm)	d _w	D1	D2	D3	D4	L1	L2	L3	L4	L5	L6	A, B	C	nx _{d6}
30	20	52	117	140	118	35	30	114	30	22	75	G3/8	G1/8	6x12
35	25	58	124	150	128	35	30	127	30	22	85	G3/8	G1/8	6x12
40	30	62	134	165	138	35	30	129	30	24	87	G3/8	G1/8	6x12
45	35	68	140	175	148	35	30	130	30	24	87	G3/8	G1/8	6x12
50	40	75	145	175	148	35	30	133	34	26	90	G3/8	G1/8	8x12
55	45	82.7	150	175	148	35	30	135	34	26	90	G3/8	G1/8	8x12
60	50	85	160	185	158	41	30	150	34	30	105	G3/8	G1/8	8x12
65	50	90	170	195	168	41	30	160	34	30	105	G3/8	G1/8	8x12
70	55	95	175	205	178	41	30	160	34	30	105	G3/8	G1/8	8x12
75	60	100	180	205	178	41	30	160	34	30	105	G3/8	G1/8	8x14
80	65	110	190	220	188	41	40	190	44	30	105	G3/8	G1/8	8x14
85	70	115	195	230	198	41	40	190	44	30	105	G3/8	G1/8	8x14
90	75	120	200	230	198	41	40	190	44	30	105	G3/8	G1/8	8x14
95	80	127	205	235	203	41	40	190	44	30	105	G3/8	G1/8	8x14
100	80	130	210	240	208	41	40	190	44	30	105	G3/8	G1/8	8x14
105	85	135	215	250	218	41	40	190	44	30	105	G1/2	G1/4	8x14
110	90	140	230	260	228	41	40	190	44	31	110	G1/2	G1/4	8x14
115	95	145	235	270	238	41	40	190	44	31	110	G1/2	G1/4	8x14
120	100	150	240	270	238	42	40	200	50	31	120	G1/2	G1/4	8x14
130	110	160	255	290	258	42	40	200	50	31	120	G1/2	G1/4	8x18
140	120	172	265	305	268	43	50	220	50	41	130	G1/2	G1/4	8x18
150	130	185	275	315	278	43	50	220	50	41	130	G1/2	G1/4	8x18
160	140	195	290	335	298	43	50	220	50	41	130	G1/2	G1/4	8x18
170	150	205	300	335	323	47	50	220	50	45	130	G1/2	G1/4	8x18
180	160	220	330	355	358	47	50	250	50	45	140	G1/2	G1/4	8x18
190	170	230	345	375	358	47	50	250	55	45	140	G1/2	G1/4	8x18
200	180	240	365	395	378	47	50	250	55	45	140	G1/2	G1/4	8x18
210	190	260	385	415	378	50	50	250	55	45	140	G1/2	G1/4	12x18
220	190	270	395	425	388	50	50	250	55	45	140	G1/2	G1/4	12x18
230	200	280	395	425	388	50	50	300	55	45	160	G1/2	G1/4	12x18