


# HMK-09(SeccoMix)

Type: Kettle Seal  
 Replacement: Burgmann SECCOMIX  
 Temperature: -30 to +180°C  
 Pressure : ≤5.0Mpa  
 Speed: ≤10m/s  
 Material : B,A,P,E,N,V

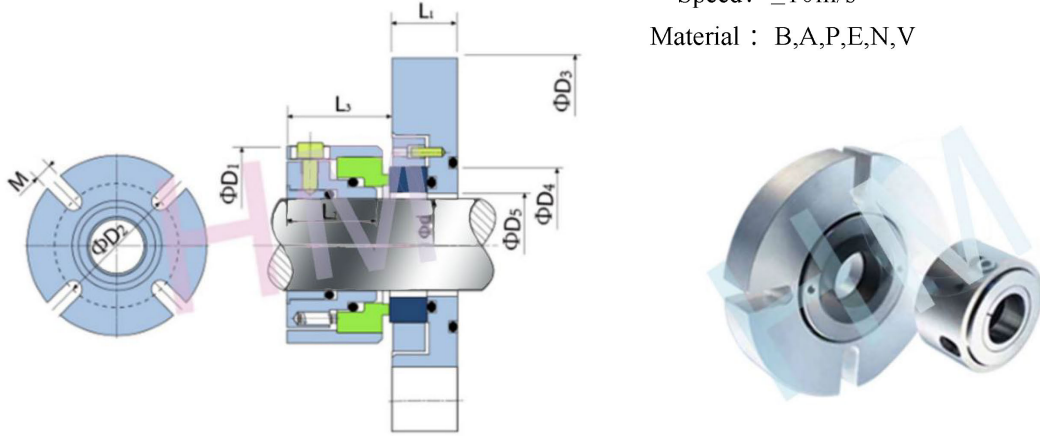

d (mm)	d (inch)	D1	D2		D3	D4	D5	L1	L2	L3	M
			min	max							
25	1.000	68	100	132	148	-	34	26	35	41.5	11
28	1.125	68	100	132	148	55	34	26	35	41.5	11
30	-	68	100	132	148	55	34	26	35	41.5	11
32	1.250	73	105	137	153	60	39	26	35	41.5	11
35	1.375	73	105	137	153	60	39	26	35	41.5	11
38	1.500	78	110	142	158	65	44	26	35	41.5	11
40	-	78	110	142	158	65	44	26	35	41.5	11
45	1.625	83	115	152	163	68	49	26	35	41.5	11
-	1.750	83	115	152	163	68	49	26	35	41.5	11
48	1.875	88	125	160	178	73	54	26	35	41.5	14
50	-	88	125	160	178	73	54	26	35	41.5	14
55	2.000	93	130	165	183	78	59	26	35	41.5	14
-	2.125	93	130	165	183	78	59	26	35	41.5	14
60	2.250	98	135	170	188	85	64	26	35	41.5	14
65	2.375	103	140	175	193	90	69	26	35	44.5	14
-	2.500	103	140	175	193	90	69	26	35	44.5	14
70	2.625	108	145	180	198	95	74	26	38	44.5	14
-	2.750	108	145	180	198	95	74	26	38	44.5	14
75	2.875	113	150	185	203	100	79	26	38	44.5	14
80	3.000	118	155	190	208	105	84	26	38	44.5	14
85	3.250	123	160	195	213	110	89	26	38	44.5	14
90	3.500	128	165	200	218	115	94	26	38	44.5	14
95	3.750	133	170	205	223	120	99	26	38	44.5	14
100	-	138	175	210	228	125	104	26	38	44.5	14
105	4.000	143	180	215	233	130	109	26	38	44.5	14
110	4.250	148	185	220	238	135	114	26	38	44.5	18
115	4.500	153	196	243	267	140	119	26	38	44.5	18
125	4.750	163	206	253	277	150	129	26	38	44.5	18
140	5.000	178	221	273	297	165	144	26	38	44.5	18
-	5.250	178	221	273	297	165	144	26	38	44.5	18
-	5.500	178	221	273	297	165	144	26	38	44.5	18
150	5.750	188	231	283	307	175	154	26	38	44.5	18
160	6.000	198	241	283	317	185	164	26	38	44.5	18
-	6.250	198	241	283	317	185	164	26	38	44.5	18