


HMK-J05(32i)

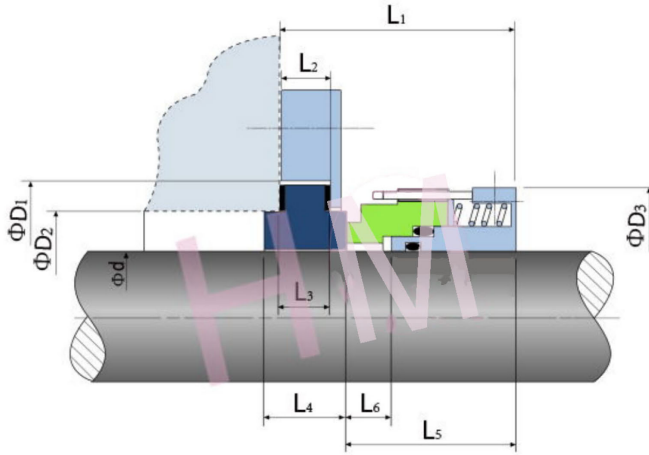

Type: Kettle seal
 Replacement: Crane 32i
 Temperature: -20 to +150°C
 Pressure : ≤ 1.0 Mpa
 Speed: ≤ 5 m/s
 Material: B,A1,Q1,Q2,U2,P,
 E,N,V,F,G,Alfa

d (inch)	D1	D2	D3	L1	L2	L3	L4	L5	L6
1.000	2.406	2.000	2.500	2.718	0.468	0.500	0.812	2.062	0.562
1.125	2.656	2.125	2.625	2.750	0.468	0.500	0.875	2.062	0.562
1.250	2.781	2.250	2.750	2.750	0.468	0.500	0.875	2.062	0.562
1.375	3.031	2.500	2.875	2.750	0.468	0.500	0.875	2.062	0.562
1.500	3.156	2.625	3.000	2.750	0.468	0.500	0.875	2.062	0.562
1.625	3.281	2.75	3.125	2.750	0.468	0.500	0.875	2.062	0.562
1.750	3.531	2.875	3.250	0.875	0.593	0.625	1.000	2.062	0.562
1.875	3.656	3.000	3.375	0.875	0.593	0.625	1.000	2.062	0.562
2.000	3.781	3.125	3.500	0.875	0.593	0.625	1.000	2.062	0.562
2.125	3.906	3.250	3.625	0.875	0.593	0.625	1.000	2.062	0.562
2.250	4.031	3.375	3.750	0.875	0.593	0.625	1.000	2.062	0.562
2.375	4.156	3.500	3.875	0.875	0.593	0.625	1.000	2.062	0.562
2.500	4.281	3.625	4.000	0.875	0.593	0.625	1.000	2.062	0.562
2.625	4.406	3.750	4.125	0.875	0.593	0.625	1.000	2.062	0.562
2.750	4.531	3.875	4.250	0.875	0.593	0.625	1.000	2.062	0.562
2.875	4.656	4.000	4.375	0.875	0.593	0.625	1.000	2.062	0.562
3.000	4.781	4.125	4.500	0.875	0.593	0.625	1.000	2.062	0.562
3.125	4.906	4.250	4.625	0.875	0.593	0.625	1.000	2.062	0.562
3.250	5.031	4.375	4.750	0.875	0.593	0.625	1.000	2.062	0.562
3.375	5.156	4.500	4.875	0.875	0.593	0.625	1.000	2.062	0.562
3.500	5.218	4.625	5.000	0.875	0.593	0.625	1.000	2.062	0.562
3.625	5.406	4.750	5.125	0.875	0.593	0.625	1.000	2.062	0.562
3.750	5.531	4.875	5.250	0.875	0.593	0.625	1.000	2.062	0.562
3.875	5.656	5.000	5.375	0.875	0.593	0.625	1.000	2.062	0.562
4.000	5.781	5.125	5.500	0.875	0.593	0.625	1.000	2.062	0.562
4.125	5.906	5.250	5.625	0.875	0.593	0.625	1.000	2.062	0.562
4.250	6.031	5.375	5.750	0.875	0.593	0.625	1.000	2.062	0.562
4.375	6.156	5.500	5.875	0.875	0.593	0.625	1.000	2.062	0.562
4.500	6.281	5.625	6.000	0.875	0.593	0.625	1.000	2.062	0.562