



HMK-14(2001/2002/2004/2005)

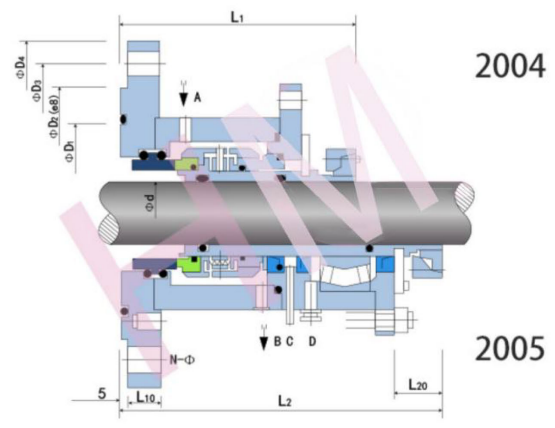

Type: Kettle Seal
 Replacement: Small spring dual-end surface balanced
 Temperature: -20°C to $+300^{\circ}\text{C}$
 Pressure: $\leq 1.6\text{Mpa}$
 Speed: $\leq 3\text{m/s}$
 Material: Q1,Q2,A,B,U1,U2,P,E,V,T,F,G,T2,M5

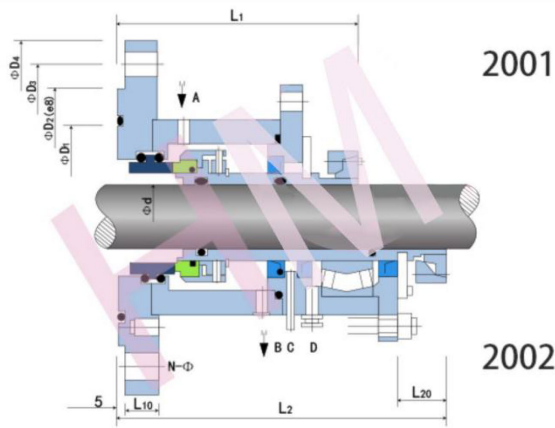

d (mm)	D1	D2	D3	D4	L1	L2	L10	L20	n-Ø
30	90	110	145	175	135	215	18	28	4-18
40	90	110	145	175	28	215	18	28	4-18
50	135	176	210	240	140	230	20	28	8-18
60	135	176	210	240	150	240	20	28	8-18
70	135	176	210	240	160	280	20	28	8-18
80	155	204	240	275	160	280	24	34	8-22
90	190	234	270	305	170	280	24	34	8-22
100	190	234	270	305	170	280	24	34	8-22
110	215	260	295	330	195	290	24	34	8-22
120	215	260	295	330	195	290	24	34	8-22
130	215	260	295	330	200	305	24	40	8-22
140	250	313	350	395	200	305	24	40	12-22
160	265	313	350	395	205	310	28	40	12-22
180	310	364	400	445	210	315	28	40	12-22
200	310	364	400	445	215	320	28	40	12-22
220	340	422	460	505	220	325	28	40	16-22