


HMK-17(205)

Type: Kettle Seal
 Temperature: -20°C to +200°C
 Pressure: -0.1 to 0.6Mpa
 Speed: ≤2m/s
 Material: Q1,Q2,A,B,U1,U2,P,
 -E,V,T,F,G,T2,M5

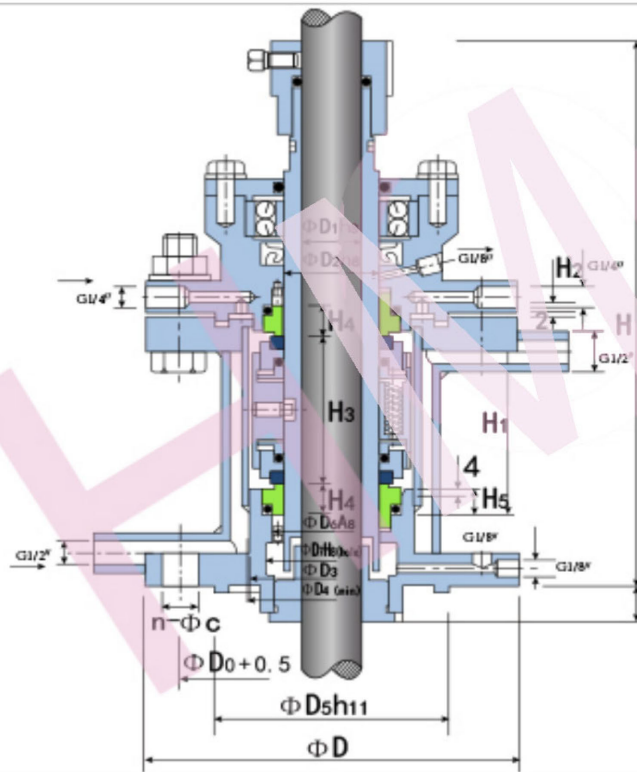

D1 (mm)	D2	D	D0	D3	D4	D5	D6	D7	H	H1	H2	H3	H4	H5	n-C
30	45	185	150	78	81	116	61	69	295	106	5	79	17	14	4-Ø18
40	55	225	170	88	100	135	71	79	297	106	5	79	17	14	4-Ø18
50	65	235	200	98	125	164	86	96	308	113	6	81	20	17	8-Ø18
65	80	235	200	118	125	164	101	111	311	113	6	81	20	17	8-Ø18
80	95	260	225	133	150	188	121	131	339	118	6	83	22	19	12-Ø18
95	115	290	255	153	182	220	141	151	357	128	6	93	22	19	12-Ø18
110	130	315	280	168	182	245	161	171	368	133	8	93	24	21	12-Ø18