


HMK-09(206)



Type: kettle Seal
 Temperature: -20°C to $+200^{\circ}\text{C}$
 Pressure: $\leq 1.6\text{Mpa}$
 Speed: $\leq 2\text{m/s}$
 Material: Q1,Q2,A,B,U1,U2,P,
 E,V,T,F,G,T2,M5

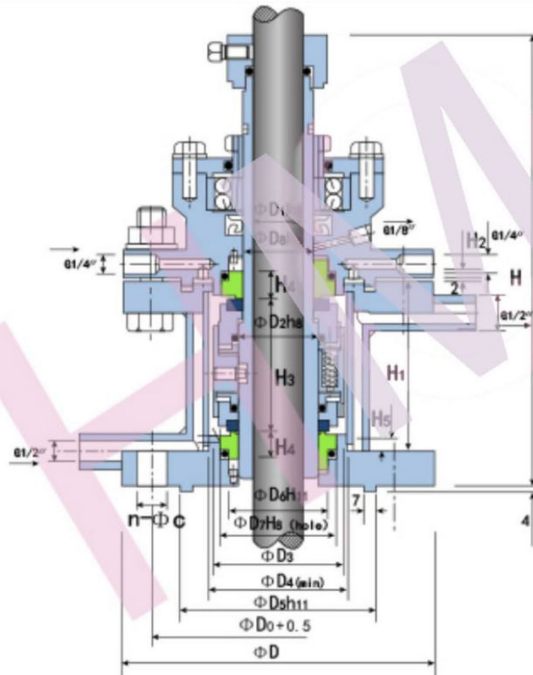

D1 (mm)	D2	D	D0	D3	D4	D5	D6	D7	D8	H	H1	H2	H3	H4	H5	n-C
30	45	185	150	78	81	116	61	69	40	292	117	5	91	17	14	4-Ø18
40	55	225	170	88	100	135	71	79	50	295	117	5	91	17	14	4-Ø18
50	65	235	200	98	125	164	86	96	60	307	125	6	93	20	17	8-Ø18
65	80	235	200	118	125	164	101	111	75	314	125	6	93	20	17	8-Ø18
80	95	260	225	133	150	188	121	131	90	351	135	6	99	22	19	12-Ø18
95	115	290	255	153	182	220	141	151	110	372	141	6	105	22	19	12-Ø18
110	130	315	280	168	182	245	161	171	125	395	143	8	105	24	21	12-Ø18