


## HMD-17

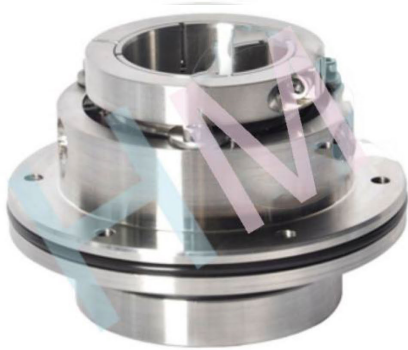

Type: Multi-Spring Single Mechanical Seal  
Temperature:  $\leq 140^{\circ}\text{C}$   
Pressure:  $\leq 1.1\text{Mpa}$   
Speed:  $\leq 10\text{m/s}$   
Material: Q1,Q2,U2,T,V,M1,F,G,M

### \*Product description

This type slurry pump mechanical seal belongs to multi-spring single end mechanical seal, sealing surface are made of high quality carbide and silicon carbide, the base material can be selected as SUS304, SUS316L, 2205, 2507, etc. The structure has the advantages of anti - clogging, anti - abrasion, anti - corrosion and so on.

### \*Product features

Single end pack mechanical seal. Easy to install and use. Equilibrium, arbitrary rotation. Short internal working length. The static ring compensates the multi - spring external non - contact with the medium.

According to user requirements can choose single end face, double end face structure.

### \*Applicable industries:

Mainly used for side feed agitator in FGD flue gas desulfurization system for coal-fired power generation.

