


HMSR-03

Type: Slurry Pump Seal
Temperature: $\leq 150^{\circ}\text{C}$
Pressure: $\leq 1\text{Mpa}$
Speed: $\leq 1600\text{rpm}$
Material: Q1,Q2,U2,T,V,M1,F,G,M

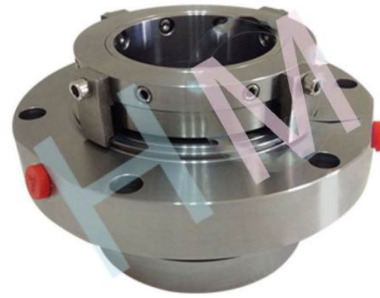

*Product description:

Xiangfan 525 LC double cartridge series mechanical seal short axial dimensions, compact structure, convenient installation, simple to use, high safety coefficient, adopt double container type structure, durable, good stability is mainly used in coal-fired flue gas desulfurization, is suitable for the gypsum slurry pump, gypsum, limestone slurry pump discharge pump, mine slurry pump, etc.

*Apply to the host:

Xiangfan 525 pump manufacturers.

*Product features:

Xiangfan 525 LC double cartridge series mechanical seal series features short axial size, compact structure, convenient installation, simple use and high safety factor. It adopts single end mounted structure, durable and good stability, and is mainly applicable to gypsum slurry pump, limestone slurry pump, gypsum discharge pump, slag slurry pump, etc.

*Product parameters:

Temperature: $\leq 120^{\circ}\text{C}$
Pressure: $\leq 1.6\text{mpa}$
Solid particle content: $\leq 30\%$
Diameter: 40mm to 855mm
Suitable medium: water, oil, acid, alkali and other corrosive medium

*Scope of application:

Chemical, petroleum, paper, pharmaceutical, smelting, light industry, mining, thermal power and other industries .