




# HMT20



Type: o-ring mounted seats, with anti-rotation slot, can apply to American standard seals housing dimensions

Replacement: Vulcan 21, AES S07/S070, Crane W type, Roten W, Flowserve 1 H

Material: V1, Q1, Q2, U1, U2

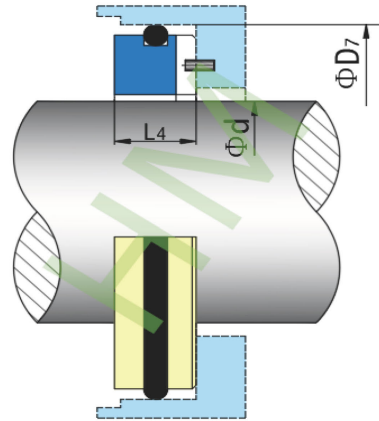

[hengmi@meseal.com](mailto:hengmi@meseal.com)

Size (inch)	Size (mm)	D7	L4		Size (inch)	Size (mm)	D7	L4
0.375	-	24.60	8.7		1.625	-	60.35	11.9
-	10	24.60	8.7		-	42	63.50	11.9
-	12	27.79	8.7		-	43	63.50	11.9
0.500	-	27.79	8.7		1.750	-	63.50	11.9
-	13	27.79	8.7		-	45	63.50	11.9
-	14	30.95	10.3		1.875	-	66.70	11.9
-	15	30.95	10.3		-	48	66.70	11.9
0.625	-	30.95	10.3		-	50	69.85	13.5
-	16	30.95	10.3		2.000	-	69.85	13.5
-	18	34.15	10.3		-	53	73.05	13.5
0.750	-	34.15	10.3		2.125	-	73.05	13.5
-	20	35.70	10.3		-	55	76.20	13.5
-	22	37.30	10.3		2.250	-	76.20	13.5
0.875	-	37.30	10.3		-	58	79.40	13.5
-	24	40.50	10.3		-	60	79.40	13.5
-	25	40.50	10.3		2.375	-	79.40	13.5
1.000	-	40.50	10.3		-	63	82.55	13.5
-	28	47.63	11.9		2.500	-	82.55	13.5
1.125	-	47.63	11.9		-	65	92.10	15.9
-	30	50.80	11.9		2.625	-	92.10	15.9
1.250	-	50.80	11.9		2.750	-	95.25	15.9
-	32	50.80	11.9		-	70	95.25	15.9
-	33	53.98	11.9		2.875	-	98.45	15.9
1.375	-	53.98	11.9		-	75	101.65	15.9
-	35	53.98	11.9		3.000	-	101.65	15.9
-	38	57.15	11.9		-	80	111.15	19.9
1.500	-	57.15	11.9		-	90	120.65	19.9
	40	60.35	11.9		-	100	133.35	19.9