
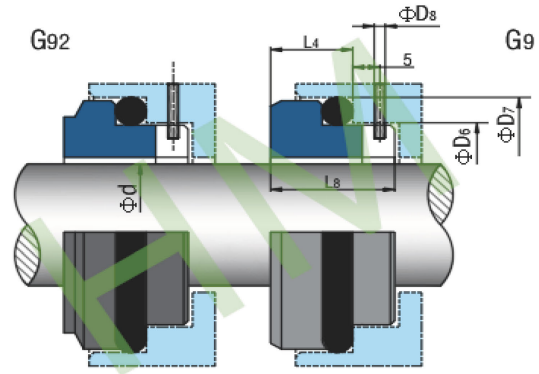


HMG9/G92

Type: o-ring mounted seats, with anti-rotation pin,
according with DIN24960 stangard

Replacement: Burgmann G9/G92,AES S02,Vulcan 8
DINL,Flowserve 8L

Material: G9:V1,Q1,Q2,U1,U2. G92:A,B



hengmi@meseal.com

d (mm)	D6	D7	D8	L4	L8
10	17	21	3	10.0	17.5
12	19	23	3	10.0	17.5
14	21	25	3	10.0	17.5
16	23	27	3	10.0	17.5
18	27	33	3	11.5	19.5
20	29	35	3	11.5	19.5
22	31	37	3	11.5	19.5
24	33	39	3	11.5	19.5
25	34	40	3	11.5	19.5
28	37	43	3	11.5	19.5
30	39	45	3	11.5	19.5
32	42	48	3	11.5	19.5
33	42	48	3	11.5	19.5
35	44	50	3	11.5	19.5
38	49	56	4	14.0	22.0
40	51	58	4	14.0	22.0
43	54	61	4	14.0	22.0
45	56	63	4	14.0	22.0
48	59	68	4	14.0	22.0
50	62	70	4	15.0	23.0
53	65	73	4	15.0	23.0
55	67	75	4	15.0	23.0
58	70	78	4	15.0	23.0
60	72	80	4	15.0	23.0
63	75	83	4	15.0	23.0
65	77	85	4	15.0	23.0
68	81	90	4	18.0	26.0
70	83	92	4	18.0	26.0
75	88	97	4	18.0	26.0
80	95	105	4	18.0	26.2
85	100	110	4	18.0	26.2
90	105	115	4	18.0	26.2
95	110	120	4	17.2	25.2
100	115	125	4	17.2	25.2