


HMC03

Type: L section clamp ring for use with AES
P08(our CO-POB)

Replacement: AES C03

Material: F,G

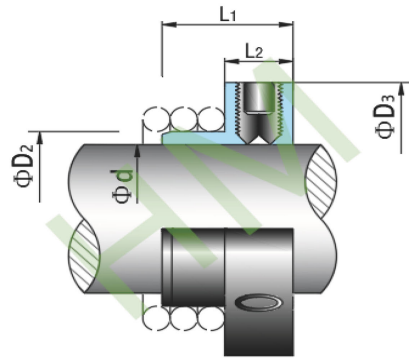

d		D2		D3		L1		L2	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
12.0	0.472	15	0.591	21	0.827	15.0	0.591	6	0.236
12.7	0.500	16	0.630	21	0.827	15.0	0.591	6	0.236
14.0	0.551	17	0.669	23	0.906	15.0	0.591	6	0.236
15.0	0.591	18	0.709	24	0.945	15.0	0.591	6	0.236
15.8	0.622	19	0.748	25	0.984	15.0	0.591	6	0.236
16.0	0.630	19	0.748	25	0.984	15.0	0.591	6	0.236
18.0	0.709	21	0.827	31	1.220	15.0	0.591	6	0.236
19.1	0.752	22	0.866	31	1.220	15.0	0.591	6	0.236
20.0	0.787	23	0.906	33	1.299	15.0	0.591	6	0.236
22.0	0.866	25	0.984	35	1.378	15.0	0.591	6	0.236
22.2	0.874	25	0.984	35	1.378	15.0	0.591	6	0.236
24.0	0.945	27	1.063	37	1.457	15.0	0.591	6	0.236
25.0	0.984	28	1.102	38	1.496	15.0	0.591	6	0.236
25.4	1.000	29	1.142	38	1.496	15.0	0.591	6	0.236
28.0	1.102	32	1.260	41	1.614	16.5	0.650	7	0.276
28.6	1.126	33	1.299	41	1.614	16.5	0.650	7	0.276
30.0	1.181	34	1.339	43	1.693	16.5	0.650	7	0.276
31.7	1.248	36	1.417	45	1.772	16.5	0.650	7	0.276
32.0	1.26	36	1.417	45	1.772	16.5	0.650	7	0.276
34.9	1.374	39	1.535	48	1.890	16.5	0.650	7	0.276
35.0	1.378	39	1.535	48	1.890	16.5	0.650	7	0.276
38.0	1.496	42	1.654	53	2.087	19.0	0.748	7	0.276
38.1	1.500	42	1.654	53	2.087	19.0	0.748	7	0.276
40.0	1.575	44	1.732	55	2.165	19.0	0.748	7	0.276
41.2	1.622	45	1.772	55	2.165	19.0	0.748	7	0.276
42.0	1.654	46	1.811	57	2.244	19.0	0.748	7	0.276
43.0	1.693	47	1.850	58	2.283	19.0	0.748	7	0.276
44.4	1.748	49	1.929	60	2.362	19.0	0.748	7	0.276
45.0	1.772	49	1.929	60	2.362	19.0	0.748	7	0.276
47.6	1.874	52	2.047	63	2.480	19.0	0.748	7	0.276
48.0	1.890	52	2.047	63	2.480	19.0	0.748	7	0.276
50.0	1.969	54	2.126	65	2.559	19.0	0.748	7	0.276