
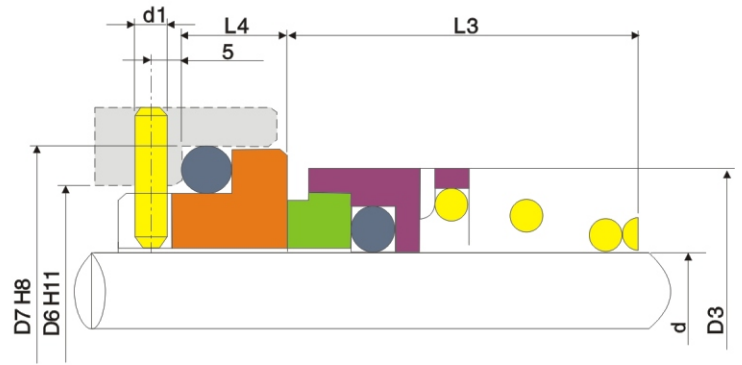


HM8D

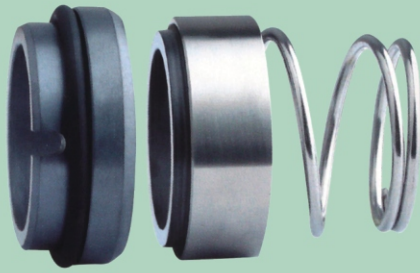

O-ring Mechanical Series

Operational Conditions:
 Temperature: -30°C to $+200^{\circ}\text{C}$
 Pressure: $\leq 1.2\text{MPa}$
 Speed: $\leq 20\text{m/s}$

Materials:
 Stationary Ring: Q2, U2, B
 Rotary Ring: Q2, V1, U2
 Secondary Seal: P, E, V
 Spring and Metal Parts: F, G

Applications: Clean water, sewage water, oil and other moderately corrosive fluids.

Model	d	D7	D6	D3	L3	L4	d1
HM8D—10	10	21.00	17.00	19.00	15.50	10.00	3.00
HM8D—12	12	23.00	19.00	21.00	16.00	10.00	3.00
HM8D—14	14	25.00	21.00	23.00	16.50	10.00	3.00
HM8D—16	16	27.00	23.00	26.00	18.00	10.00	3.00
HM8D—18	18	33.00	27.00	29.00	19.50	11.50	3.00
HM8D—20	20	35.00	29.00	31.00	22.00	11.50	3.00
HM8D—22	22	37.00	31.00	33.00	21.50	11.50	3.00
HM8D—24	24	39.00	33.00	35.00	23.50	11.50	3.00
HM8D—25	25	40.00	34.00	36.00	26.50	11.50	3.00
HM8D—28	28	43.00	37.00	40.00	26.50	11.50	3.00
HM8D—30	30	45.00	39.00	43.00	26.50	11.50	3.00
HM8D—32	32	48.00	42.00	46.00	28.50	11.50	3.00
HM8D—35	35	50.00	44.00	49.00	28.50	11.50	3.00
HM8D—38	38	56.00	49.00	53.00	33.50	14.00	4.00
HM8D—40	40	58.00	51.00	56.00	36.00	14.00	4.00
HM8D—43	43	61.00	54.00	59.00	38.50	14.00	4.00
HM8D—45	45	63.00	56.00	61.00	39.50	14.00	4.00
HM8D—48	48	66.00	59.00	64.00	46.00	14.00	4.00
HM8D—50	50	70.00	62.00	66.00	45.00	15.00	4.00
HM8D—53	53	73.00	65.00	69.00	47.00	15.00	4.00
HM8D—55	55	75.00	67.00	71.00	49.00	15.00	4.00
HM8D—58	58	78.00	70.00	76.00	55.00	15.00	4.00
HM8D—60	60	80.00	72.00	78.00	55.00	15.00	4.00
HM8D—65	65	85.00	77.00	84.00	55.00	15.00	4.00
HM8D—68	68	90.00	81.00	88.00	55.00	18.00	4.00
HM8D—70	70	92.00	83.00	90.00	57.00	18.00	4.00
HM8D—75	75	97.00	88.00	98.00	62.00	18.00	4.00
HM8D—80	80	105.00	95.00	100.00	61.80	18.20	4.00