


HMSU




Operating Limits

- Unbalanced Seal
- Pressure : Up to 10kg/cm²
- Temperature : -30°C~250°C
- Velocity : 1500CP
- Slurry : Up to 7.0%

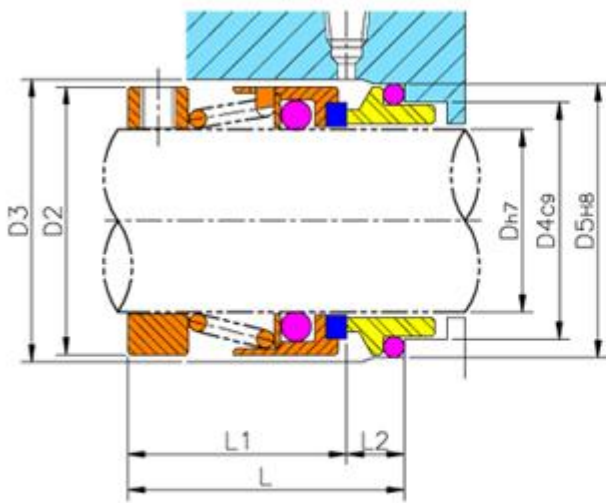

SUS TYPE

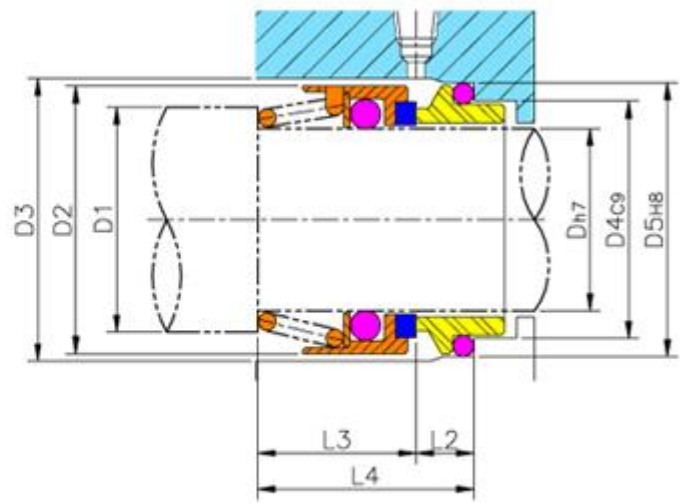

SU TYPE

➤ SU Fitting Dimension (mm)

| Model | D | D1 | D2 | D3 | D4 | D5 | L | L1 | L2 | L3 | L4 |
|-------|----|----|----|----|----|----|------|----|-----|----|------|
| SU-20 | 20 | 26 | 34 | 36 | 29 | 35 | 44.5 | 35 | 9.5 | 24 | 33.5 |
| SU-22 | 22 | 28 | 36 | 38 | 31 | 37 | 46.5 | 37 | 9.5 | 26 | 35.5 |

| | | | | | | | | | | | |
|-------|----|----|----|----|----|----|------|----|------|----|------|
| SU-25 | 25 | 31 | 39 | 41 | 34 | 40 | 46.5 | 37 | 9.5 | 26 | 35.5 |
| SU-28 | 28 | 35 | 42 | 44 | 37 | 43 | 46.5 | 37 | 9.5 | 26 | 35.5 |
| SU-30 | 30 | 37 | 44 | 46 | 39 | 45 | 46.5 | 37 | 9.5 | 26 | 35.5 |
| SU-32 | 32 | 39 | 46 | 48 | 42 | 48 | 48.5 | 39 | 9.5 | 28 | 37.5 |
| SU-35 | 35 | 43 | 49 | 51 | 44 | 50 | 48.5 | 39 | 9.5 | 28 | 37.5 |
| SU-40 | 40 | 49 | 56 | 60 | 51 | 58 | 57 | 47 | 10 | 34 | 44 |
| SU-45 | 45 | 55 | 61 | 65 | 56 | 63 | 63.5 | 50 | 13.5 | 37 | 50.5 |
| SU-50 | 50 | 61 | 66 | 70 | 62 | 70 | 70 | 56 | 14 | 43 | 57 |
| SU-55 | 55 | 66 | 71 | 75 | 67 | 75 | 76 | 62 | 14 | 49 | 63 |
| SU-60 | 60 | 71 | 80 | 85 | 72 | 80 | 82 | 68 | 14 | 55 | 69 |
| SU-65 | 65 | 77 | 85 | 90 | 77 | 85 | 82 | 68 | 14 | 55 | 69 |