

Mechanical Seals for Sanitary Pumps

HM 290

● 290 Seals used For APV Pumps.

● Operational Conditions:

Temperature: -40°C to $+180^{\circ}\text{C}$

Pressure: $\leq 0.8\text{MPa}$

Speed: $\leq 15\text{m/s}$



● Materials:

Stationary Ring: Q2,F,B

Rotary Ring: Q2,F,B

Secondary Seal: P,E,V

Spring and Metal parts: F,G

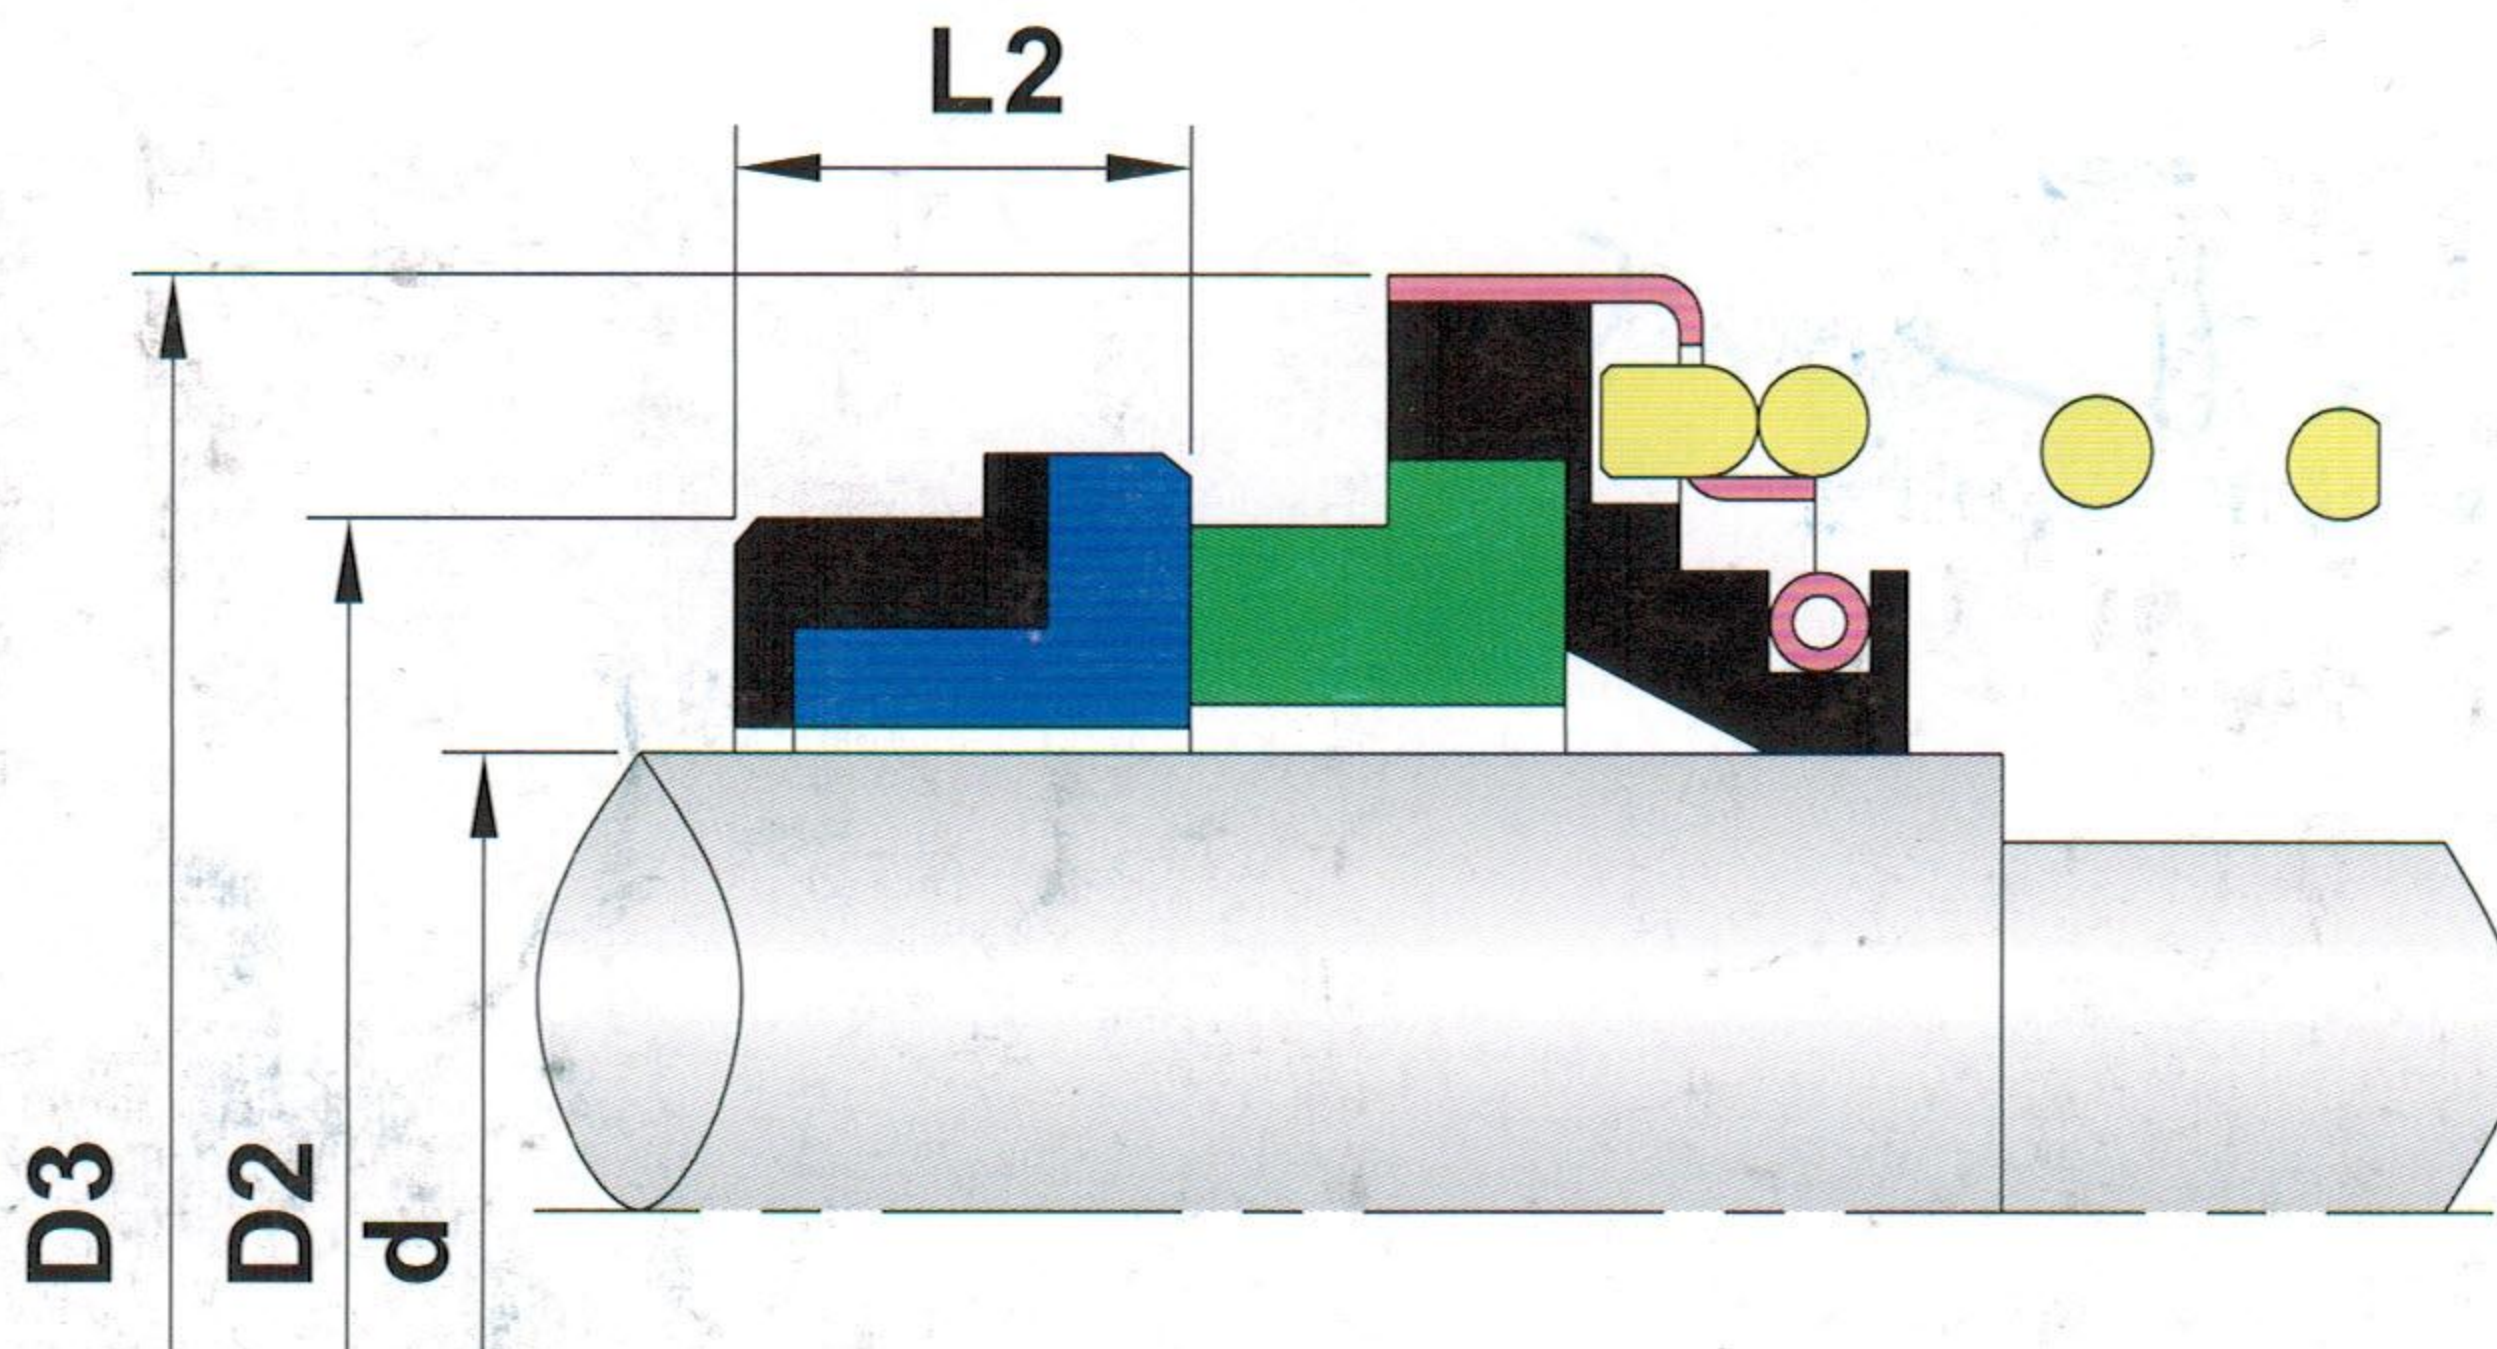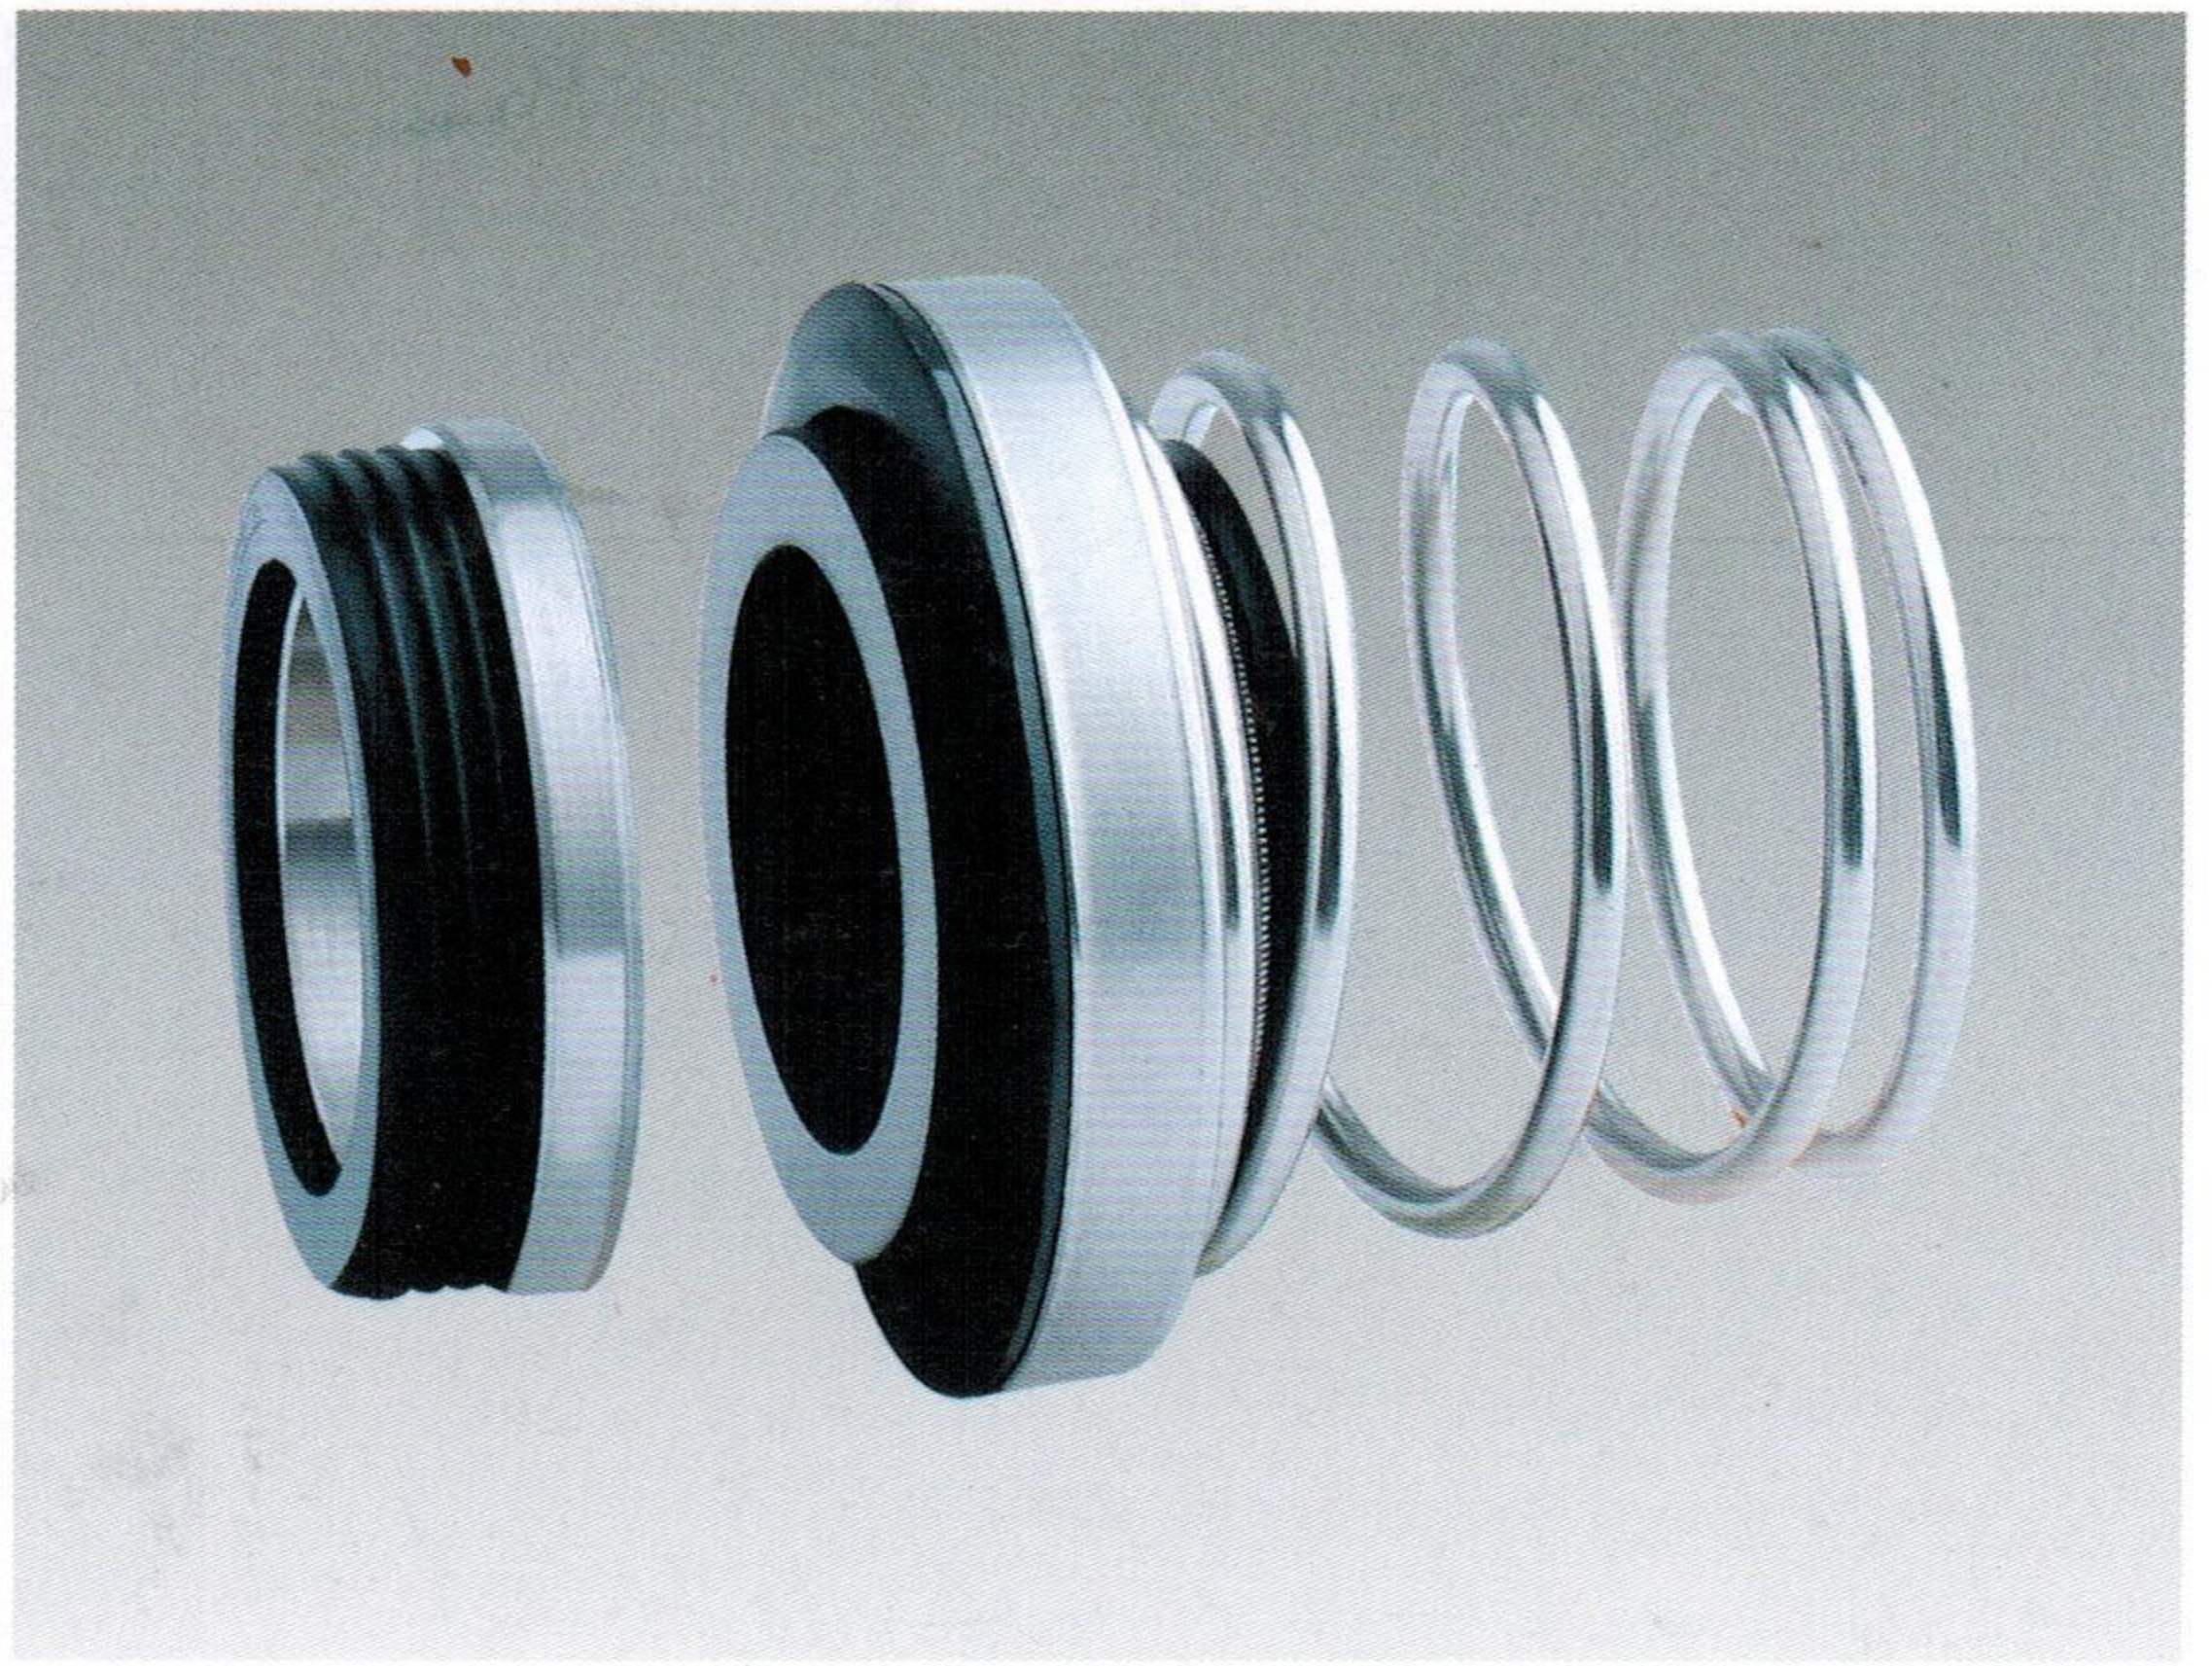

规格/Size (公制/Metric)	Code	D2	D3	L2
20	0.200	30.00	40.60	9.8
25	0.250	35.00	45.40	9.8
30	0.300	42.00	57.00	13