
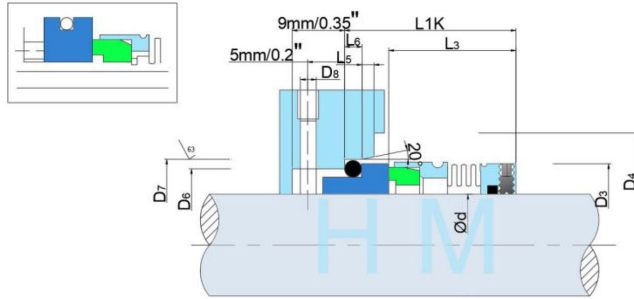


HMMB-J33(GL1B)

Type : Formed Metal Bellows Seal
 Replacement: Crane GL1 B
 Temperature: -30 to +200°C
 Pressure : ≤ 2.5 Mpa
 Speed: ≤ 18 m/s
 Material : Q1,Q2,U2,T,V,M1,F,G,M



hengmi@mesel.com

d(mm)	D3	D4	D6	D7	D8	L1K	L3	L5	L6
+0.00/ -0.05		min.		+0.00/ -0.05		+/_0.05	+/_0.05		
25	39.6	41	34	40	3	40.0	30.0	2.0	5
28	42.5	44	37	43	3	42.5	32.5	2.0	5
30	44.5	46	39	45	3	42.5	32.5	2.0	5
32	46.5	48	42	48	3	42.5	32.5	2.0	5
33	47.5	49	42	48	3	42.5	32.5	2.0	5
35	49.4	51	44	50	3	42.5	32.5	2.0	5
38	54.0	58	49	56	4	45.0	34.0	2.0	5
40	56.5	60	51	58	4	45.0	34.0	2.0	6
43	56.5	63	54	61	4	45.0	34.0	2.0	6
45	63.3	65	56	63	4	45.0	34.0	2	6
48	65.2	68	59	66	4	47.5	34.0	2.5	6
50	66.3	70	62	70	4	47.5	34.0	2.5	6
53	71.5	73	65	73	4	47.5	34.0	2.5	6
55	71.5	75	67	75	4	47.5	34.0	2.5	6
58	74.7	83	70	78	4	52.5	39.5	2.5	6
60	79.3	85	72	80	4	52.5	39.5	2.5	6
63	82.3	88	75	83	4	52.5	39.5	2.5	6
65	82.3	90	77	85	4	52.5	39.5	2.5	7
68	87.5	93	81	90	4	52.5	37.5	2.5	7
70	89.5	95	83	92	4	60.0	45.0	2.5	7
75	92.5	104	88	97	4	60.0	45.0	2.5	7
80	98.6	109	95	105	4	60.0	44.5	3.0	7
85	107.1	114	100	110	4	60.0	44.5	3.0	7
90	113.5	119	105	115	4	65.0	49.5	3.0	7
95	116.7	124	110	120	4	65.0	49.5	3.0	7
100	123.0	129	115	125	4	65.0	49.5	3.0	7