


# HMMB-J30(2609)

Type: Metal Bellow Seal  
 Replacement: Crane 2609  
 Temperature: -75°C to +200°C  
 Pressure: ≤8.0Mpa  
 Speed: ≤25m/s  
 Material : Q1,Q2,U2,T,V,M1,F,G,M

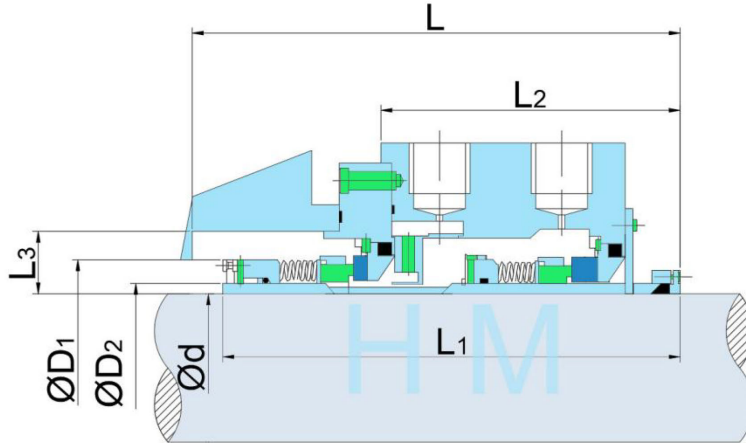

[hengmi@meseal.com](mailto:hengmi@meseal.com)

d (inch)	D1	D2	L	L1	L2	L3
1.125	2.125	1.500	5.75	5.540	3.332	1.000
1.250	2.250	1.625	5.75	5.604	3.396	1.000
1.375	2.375	1.750	5.75	5.680	3.131	1.000
1.500	2.500	1.875	5.75	5.720	3.453	1.000
1.625	2.625	2.000	5.75	5.751	3.453	1.000
1.750	2.750	2.125	5.75	5.944	3.448	1.000
1.875	2.875	2.250	5.75	6.002	3.448	1.000
2.000	3.000	2.375	6.50	6.002	3.427	1.000
2.125	3.250	2.500	6.50	6.058	3.553	1.125
2.250	3.375	2.625	6.50	6.163	3.556	1.125
2.375	3.500	2.750	6.50	6.163	3.467	1.125
2.500	3.687	2.875	6.50	6.212	3.461	1.125
2.625	3.812	3.000	6.50	6.307	3.538	1.125
2.750	4.000	3.125	6.50	6.313	3.538	1.125
2.875	4.125	3.250	6.50	6.313	3.535	1.125
3.000	4.25	3.375	6.50	6.313	3.535	1.125
3.125	4.375	3.500	7.00	6.344	3.869	1.250
3.250	4.625	3.750	7.00	6.428	3.953	1.250
3.375	4.750	3.875	7.00	6.500	4.025	1.250
3.500	4.875	4.000	7.00	6.479	4.004	1.250
3.625	5.187	4.250	7.00	6.500	4.025	1.250
3.750	5.187	4.250	7.00	6.500	4.025	1.250
3.875	5.438	4.500	7.00	6.500	4.025	1.250
4.000	5.438	4.500	7.00	6.500	4.025	1.250