

O-ring Mechanical Series

... HMM3,M3A

● Operational Conditions:

Temperature: -20°C to $+180^{\circ}\text{C}$

Pressure: $\leq 1\text{MPa}$

Speed: $\leq 15\text{m/s}$

● Materials:

Stationary Ring: V1,Q2,Q1,U2,B,A

Rotary Ring: B,A,Q1,Q2,F,G

Secondary Seal: P,E,V,M1,M2


Spring and Metal Parts: F,G,M

● Seat Type:

Standard: GWG9

Alternative: GWG6, GWG4, GWG13

● Applications: Clean water, sewage water, Oil and other moderately corrosive fluids.

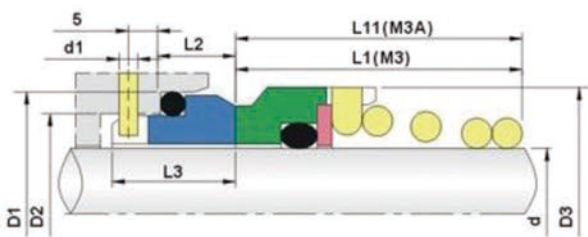

规格/Size (公制/Metric)	d	D3	D2	D1	d1	L1	L11	L2	L3
10	10	19	17	21	3	15.5	15.5	10.0	17.5
12	12	21	19	23	3	16.0	15.5	10.0	17.5
14	14	23	21	25	3	16.5	15.5	10.0	17.5
16	16	26	23	27	3	18.0	17.5	10.0	17.5
18	18	29	27	33	3	19.5	18.5	11.5	19.5
20	20	31	29	35	3	22.0	20.0	11.5	19.5
22	22	33	31	37	3	21.5	21.5	11.5	19.5
24	24	35	33	39	3	23.5	23.0	11.5	19.5
25	25	36	34	40	3	26.5	24.5	11.5	19.5
28	28	40	37	43	3	26.5	24.5	11.5	19.5
30	30	43	39	45	3	26.5	24.5	11.5	19.5
32	32	46	42	48	3	28.5	28.0	11.5	19.5
33	33	47	42	48	3	28.5	-	11.5	19.5
35	35	49	44	50	3	28.5	28.0	11.5	19.5
38	38	53	49	56	4	33.5	31.0	14.0	22.0
40	40	56	51	58	4	36.0	34.0	14.0	22.0
43	43	59	54	61	4	38.5	-	14.0	22.0
45	45	61	56	63	4	39.5	36.5	14.0	22.0
48	48	64	59	66	4	46.0	42.0	14.0	22.0
50	50	66	62	70	4	45.0	43.0	15.0	23.0
53	53	69	65	73	4	47.0	-	15.0	23.0
55	55	71	67	75	4	49.0	47.0	15.0	23.0
58	58	76	70	78	4	55.0	50.0	15.0	23.0
60	60	78	72	80	4	55.0	51.0	15.0	23.0
63	63	83	75	83	4	55.0	-	15.0	23.0
65	65	84	77	85	4	55.0	52.0	15.0	23.0
68	68	88	81	90	4	55.0	53.0	18.0	26.0
70	70	90	83	92	4	57.0	54.0	18.0	26.0
75	75	98	88	97	4	62.0	55.0	18.0	26.0
80	80	100	95	105	4	61.8	58.0	18.2	26.2