


# HMFBFD



Type : Elastomeric bellow mechanical seal  
 Replacement: AES PO4U , Crane 2(US) , Vulcan A4,  
 Flowserve5 2  
 Temperature: -20°C to +120°C  
 Pressure :  $\leq 1.4$  Mpa  
 Speed:  $\leq 15$  m/s  
 Material : V,Q1,Q2,U2,U1,B,A,P,E,V,F,G

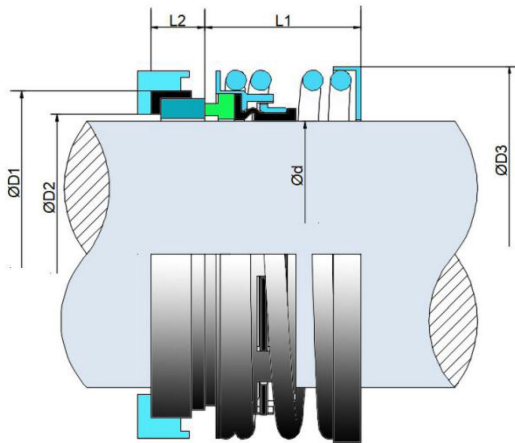

[hengmi@mesel.com](mailto:hengmi@mesel.com)

d (mm)	d	D1	D3	L1	L2
FBD-16	16	30	34.0	25	8
FBD-18	18	32	36.8	25	8
FBD-20	20	34	38.8	25	8
FBD-22	22	36	41.5	25	8
FBD-25	25	39	44.8	26	8
FBD-28	28	43	48.5	26	8
FBD-30	30	48	52.0	26	8
FBD-35	35	53	57.0	30	10
FBD-40	40	58	67.0	34	10
FBD-45	45	63	73.0	36	10
FBD-50	50	68	79.0	41	10
FBD-55	55	73	84.0	41	12
FBD-60	60	79	90.0	41	12
FBD-65	65	86	98.5	49	12
FBD-70	70	91	103.5	52	12
FBD-75	75	96	110.5	52	12
FBD-80	80	105	120.0	56	14
FBD-85	85	110	125.0	56	14
FBD-90	90	115	132.0	56	14
FBD-95	95	120	137.0	56	14
FBD-100	100	125	144.0	62	14
FBD-110	110	135	157.0	62	16
FBD-120	120	145	169.5	72	16