

HM2




hengmi@meseal.com

Type : Elastomeric bellows mechanical seal
Replacement: AES PO4U , Crane 2(US) , Vulcan A4,
Flowserve5 2

Temperature: -20°C to +120°C

Pressure : ≤1.4Mpa

Speed : ≤15m/s

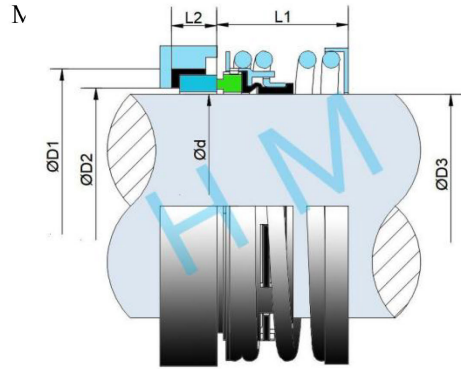

d (Inch)	d (mm)	D1	D2	D3	L1	L2
HM2-0.500	12	25.40	19.05	30.14	20.64	7.93
	14	31.75	23.80	33.32	22.23	10.28
HM2-0.625	16	31.75	23.80	33.32	22.23	10.28
	18	34.93	26.98	36.50	22.23	10.28
HM2-0.750	20	38.10	30.15	39.67	23.80	10.28
	22	38.10	30.15	39.67	23.80	10.28
HM2-0.875	24	41.28	33.32	45.50	25.40	11.10
	25	41.28	33.32	45.50	25.40	11.10
HM2-1.000	28	44.44	36.50	48.50	26.97	11.10
	30	47.63	37.90	52.37	26.97	11.10
HM2-1.125	32	47.63	37.90	52.37	26.97	11.10
	33	50.80	42.84	56.00	28.58	11.00
HM2-1.375	35	50.80	42.84	56.00	28.58	11.00
	38	53.98	46.05	59.2	28.58	11.00
HM2-1.500	40	60.38	50.80	67.00	34.93	12.70
	43	63.50	53.97	69.85	34.93	12.70
HM2-1.750	45	63.50	53.97	69.85	34.93	12.70
	48	66.68	57.15	73.03	38.10	12.70
HM2-1.875	48	69.85	60.32	73.03	38.10	12.70
	50	69.85	60.32	76.20	38.10	12.70
HM2-2.000	53	76.20	60.32	82.55	42.85	14.28
	55	79.38	61.9	85.73	42.85	14.28
HM2-2.250	60	82.55	67.39	88.90	46.02	14.28
	63	85.73	68.25	92.08	46.02	14.28
HM2-2.375	65	85.73	71.24	98.43	49.20	15.90
	70	88.90	74.60	101.60	49.20	15.90
HM2-2.750	73	95.25	77.77	104.78	52.37	15.90
	75	98.43	80.95	107.95	52.37	15.90