




HMTK(TZKA)

Type : Multi Spring Seal
 Replacement: Fluiten TZKA
 Temperature: -20°C to +180°C
 Pressure : $\leq 2.5\text{Mpa}$
 Speed: $\leq 15\text{m/s}$
 Material : Q2,U2,B,V1,P,E,V,F,GF,G

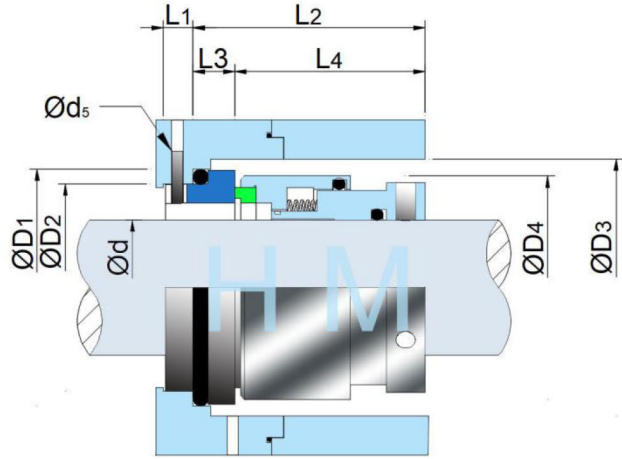

hengmi@mesel.com

d (mm)	d5	D1	D2	D3	D4	L1	L2	L3	L4
35	4	61	54.0	61	58	9	55.0	11	44.0
38	4	63	56.0	63	60	9	55.0	11	44.0
40	4	66	59.0	66	63	9	56.0	11	45.0
43	4	70	62.0	70	65	9	58.0	13	45.0
45	4	73	65.0	73	69	9	58.0	13	45.0
48	4	75	67.0	75	71	9	58.0	13	45.0
50	4	78	70.0	78	74	9	58.0	13	45.0
53	4	85	77.0	85	82	9	58.0	13	45.0
55	4	85	77.0	85	82	9	58.0	13	45.0
58	4	92	83.0	92	87	9	66.5	15	51.5
60	4	92	83.0	92	87	9	66.5	15	51.5
63	4	97	88.0	97	92	9	69.5	15	54.5
65	4	97	88.0	97	92	9	69.5	15	54.5
68	4	105	95.0	105	100	9	70.0	15.5	54.5
70	4	105	95.0	105	100	9	70.0	15.5	54.5
75	4	110	100.0	110	105	9	80.0	15.5	64.5
80	4	115	105.0	115	110	9	80.0	15.5	64.5
85	4	120	110.0	120	115	9	80.0	15.5	64.5
90	4	125	115.0	125	120	9	80.0	15.5	64.5
95	4	129	120.5	130	125	12	83.5	19	64.5
100	4	134	125.5	135	130	12	83.5	19	64.5
105	4	139	130.5	140	135	12	90.5	19	71.5
110	4	144	135.5	145	140	12	90.5	19	71.5
115	4	149	140.5	150	145	12	90.5	19	71.5
120	4	154	145.5	155	150	12	90.5	19	71.5
125	4	161	149.5	161	155	12	93.5	22	71.5
130	4	166	154.5	166	160	13	93.5	22	71.5
140	5	183	171.5	85	180	13	104.0	26	78.0
150	5	193	181.5	196	190	13	104.0	26	78.0
160	5	203	191.5	208	200	13	104.0	26	78.0
170	5	213	201.5	218	210	13	104.0	26	78.0
180	5	223	211.5	228	220	13	104.0	26	78.0
190	5	233	221.5	238	230	13	104.0	26	78.0
200	5	243	231.5	248	240	13	104.0	26	78.0