

# HMMB-AP03(S1WBC)



Type: Single Welded Bellow Cartridge Seal


Replacement: APEX S1 WBC

Temperature:  $\leq 300^{\circ}\text{C}$

Pressure:  $\leq 20.7$  Bar

Speed:  $\leq 12\text{m/s}$

Material: Q1,Q2,U2,T,V,M1,F,G,M

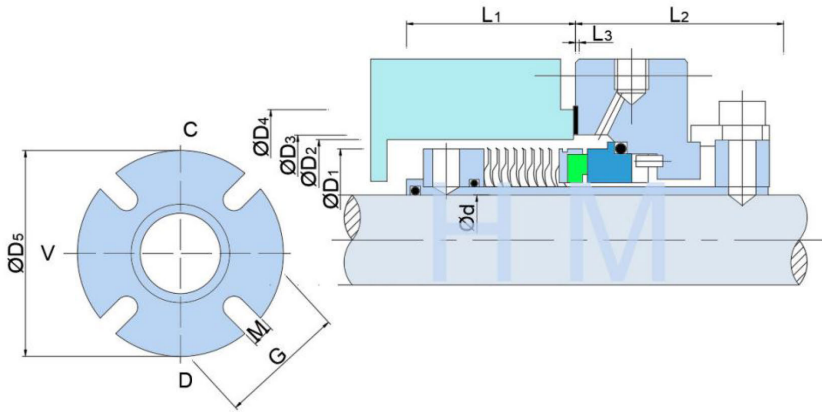

[hengmi@meseal.com](mailto:hengmi@meseal.com)

d (inch)	D1	D2 (min)	D3	D4	D5	G	L1	L2	L3	M
1.000	1.687	1.750	1.771	2.106	4.000	2.224	1.383	1.460	0.063	0.551
1.125	1.694	1.750	1.909	2.283	4.125	2.421	1.445	1.460	0.063	0.551
1.250	1.937	2.000	2.037	2.362	4.250	2.500	1.570	1.460	0.063	0.551
1.375	1.944	2.000	2.145	2.539	4.250	2.696	1.570	1.460	0.063	0.551
1.500	2.187	2.250	2.368	2.736	5.000	2.815	1.570	1.460	0.063	0.551
1.625	2.311	2.375	2.46	2.854	4.500	2.972	1.570	1.460	0.063	0.551
1.750	2.437	2.500	2.578	2.992	5.000	3.062	1.633	1.460	0.063	0.551
1.875	2.561	2.625	2.755	3.11	5.250	3.188	1.633	1.460	0.063	0.551
2.000	2.687	2.750	2.834	3.267	5.500	3.307	1.633	1.460	0.063	0.551
2.125	2.811	2.875	2.952	3.386	5.750	3.503	1.696	1.460	0.063	0.709
2.250	2.937	3.000	3.110	3.504	6.500	3.622	1.696	1.460	0.063	0.709
2.375	3.187	3.125	3.228	3.700	6.500	3.818	1.696	1.460	0.063	0.709
2.500	3.311	3.375	3.464	3.858	6.500	3.976	1.838	1.622	0.063	0.709
2.625	3.437	3.500	3.543	3.937	7.000	4.055	1.838	1.622	0.063	0.709
2.750	3.562	3.625	3.78	4.252	7.000	4.370	1.838	1.622	0.063	0.709