



HMMB-C01(186HT)



Type: Metal Bellow Seal
 Replacement: Chesterton 186HT
 Temperature: -73 to +427°C
 Pressure: ≤ 2.0 Mpa
 Speed: ≤ 20 m/s
 Material: Q1, Q2, A, B, U1, U2, P, E, V, T, F, G, T2, M5

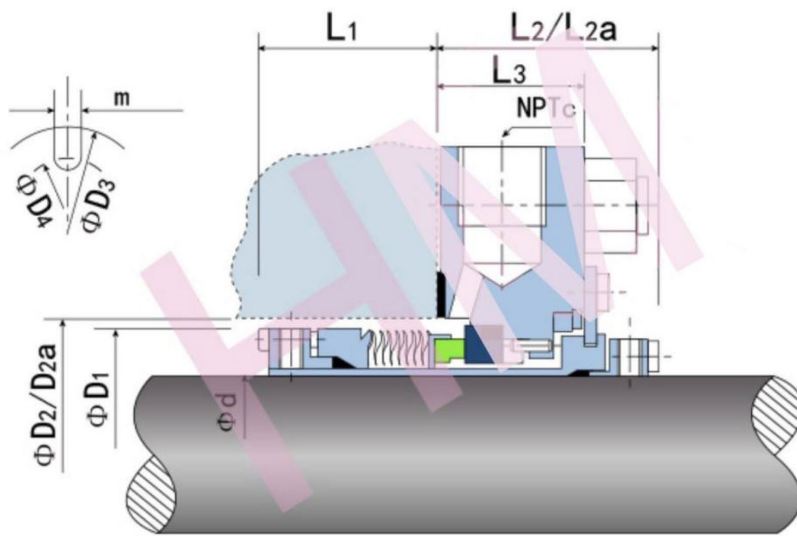

hengmi@mesel.com

d (mm)	D1	D2	D2a	D3	D4			L1	L2	L2a	L3	m	NPT
	max	min	min	max	10mm	12mm	16mm	min	max	max	max	max	
25	46	48	54	108	76	78	*	42	49	52	32	13	3/8
30	49	51	57	108	79	82	*	42	49	52	32	13	3/8
32	55	57	60	114	81	89	*	43	49	52	32	13	3/8
35	58	60	67	121	89	92	*	43	50	54	34	14	3/8
38	61	64	70	133	92	95	*	43	50	54	34	14	1/2
40	65	67	73	140	95	98	*	43	50	54	34	14	1/2
42	65	67	73	140	95	98	*	43	50	54	34	14	1/2
45	68	70	76	146	98	101	*	43	50	54	34	14	1/2
50	74	76	80	159	108	111	114	46	52	55	35	18	1/2
55	77	79	89	159	111	114	117	46	52	55	35	18	1/2
60	84	86	92	165	114	117	120	46	54	57	37	18	1/2
65	87	89	95	165	117	120	123	46	54	57	37	18	1/2