

HMGR-G31



Type: Elastomer Bellow Mechanical Seal

Suit for Grundfos, Hilge Pumps


Replacement: Vulcan 10

Temperature: -20°C to +120°C

Pressure: $\leq 1.4\text{Mpa}$

Speed: $\leq 10\text{m/s}$

Material : B,A1,Q1,Q2,U2,P,E,N,V,F,G,Alfa

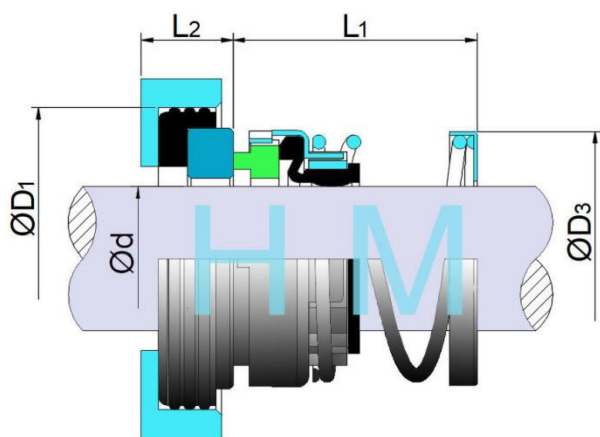

d (mm)	D1	D3	L1	L2
10	24.60	21.8	43.66	8.74
12	27.79	23.5	43.66	8.74
13	27.79	23.5	43.66	8.74
14	30.95	27.0	43.66	10.32
15	30.95	27.0	43.66	10.32
16	30.95	27.0	43.66	10.32
18	34.15	30.7	43.66	10.32
19	34.15	30.7	43.66	10.32
20	35.70	33.4	43.66	10.32
22	37.30	33.4	43.66	10.32
24	40.50	39.2	43.66	10.32
25	40.50	39.2	43.66	10.32
28	47.63	45.6	60.33	11.99
29	47.63	45.6	60.33	11.99
30	50.80	47.4	60.33	11.99
32	50.80	47.4	60.33	11.99
33	53.98	52.0	60.33	11.99
34	53.98	52.0	60.33	11.99
35	53.98	52.0	60.33	11.99
38	57.15	55.6	60.33	11.99
40	60.33	59.2	60.33	11.99