


HM-F



技术参数

- ▶ 压力: $\leq 0.6\text{MPa}$
- ▶ 线速度: $\leq 15\text{米/秒}$
- ▶ 温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$
- ▶ operating Limits
- ▶ Pressure: $\leq 0.6\text{MPa}$
- ▶ Speed: $\leq 15\text{ m/s}$
- ▶ Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

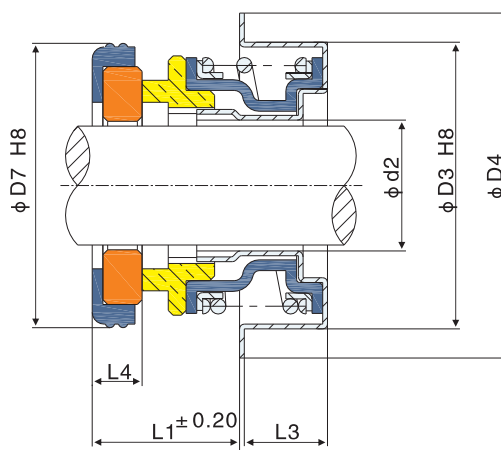

Model	Shaft (inches)	d2	D3	D4	D7	L1	L4	L3
HM F-1/2"	12.700	14.2	30.00	35.0	25.400	10.8	6.2	8.0
HM F-5/8"	15.875	18.2	36.45	41.5	31.750	16.1	10.3	8.5
HM F-3/4"	19.050	21.2	40.00	43.8	34.925	16.3	10.3	9.5
HM F-1"	25.400	26.4	47.00	51.0	41.275	16.5	11.1	12.0
HM Model	Shaft (mm)	d2	D3	D4	D7	L1	L4	L3
HM F-10	10	11.0	24.00	29.0	23	9.6	4	7.0
HM F-12S	12	14.2	28.55	32.0	25	9.8	5	8.0
HM F-12M	12	14.2	30.00	35.0	24/23	9.6	5	8.0
HM F-12L	12	14.2	33.40	38.0	25	10.9	5	6.7
HM F-16	16	18.2	36.45	41.5	31	10.9	5	8.5
HM F-16L	16	18.2	38.10	43.5	31	10.9	5	8.5
HM F-20S	20	21.2	38.00	43.8	35	10.5	5	9.5
HM F-20	20	21.2	40.00	43.8	35	10.5	5	9.5
HM F-25S	25	26.4	46.00	51.0	44	14.5	7	10.0
HM F-25	25	26.4	47.00	51.0	44	12.5	7	12.0
HM F-25L	25	26.4	52.00	57.0	48	14.5	7	12.0
HM F-30	30	31.0	52.00	57.0	48	15.4	8	11.0